



CURVAS CARACTERÍSTICAS / PERFORMANCE DATA / COURBES / KENNLINIEN

AXIAL 2800 RPM Ø 250

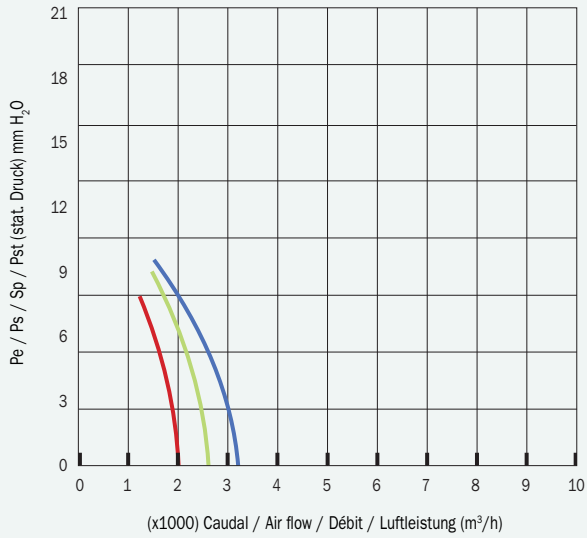


- 2-250 30 (0,18 kW)
- 2-250 40 (0,25 kW)
- 2-250 45 (0,25 kW)

AXIAL / AXIPLUS 1400 RPM Ø 250-450

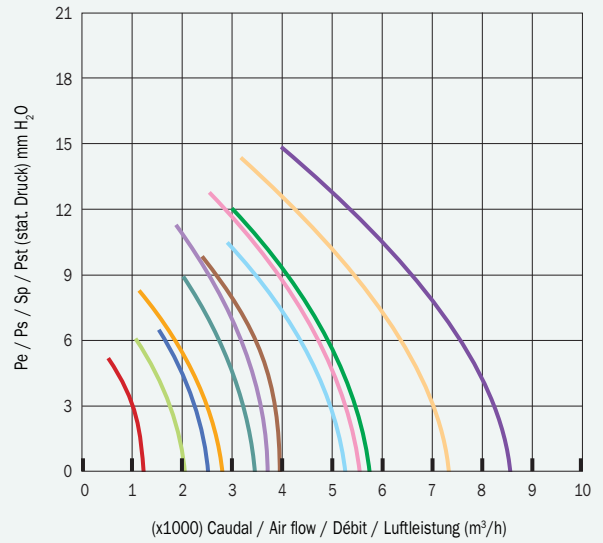


- 4-250 40 (0,06 kW)
- 4-315 34 (0,09 kW)
- 4-315 45 (0,09 kW)
- 4-355 30 (0,09 kW)
- 4-355 40 (0,09 kW)
- 4-400 30 (0,09 kW)
- 4-355 45 (0,12 kW)
- 4-400 40 (0,12 kW)
- 4-450 30 (0,18 kW)
- 4-400 45 (0,18 kW)
- 4-450 40 (0,37 kW)
- 4-450 45 (0,37 kW)

AXIAL / AXIPLUS 1400 RPM Ø 500

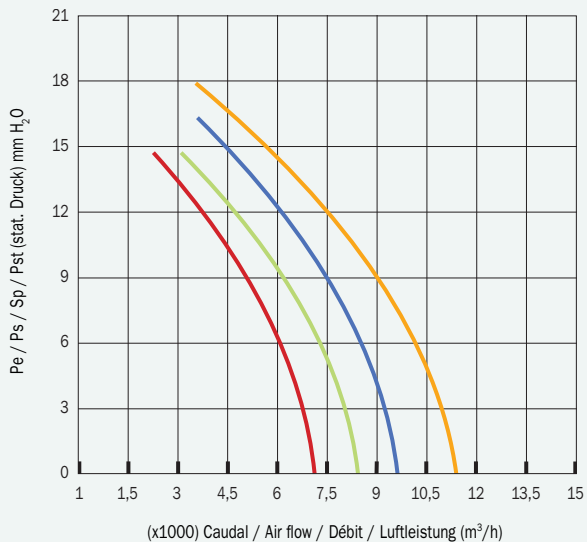

- 4-500 30 (0,18 kW)
- 4-500 34 (0,37 kW)
- 4-500 40 (0,55 kW)
- 4-500 45 (0,75 kW)


AXIAL / AXIPLUS 1400 RPM Ø 560-630

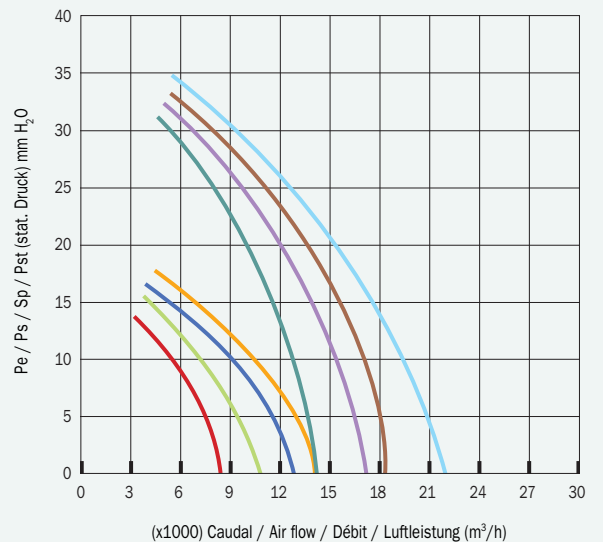

- 4-560 24 (0,37 kW)
- 4-560 34 (0,55 kW)
- 4-560 40 (0,75 kW)
- 4-560 45 (1,10 kW)
- 4-630 24 (0,75 kW)
- 4-630 34 (1,10 kW)
- 4-630 40 (1,50 kW)
- 4-630 45 (2,20 kW)


CURVAS CARACTERÍSTICAS / PERFORMANCE DATA / COURBES / KENNLINIEN

AXIAL 1400 RPM Ø 710

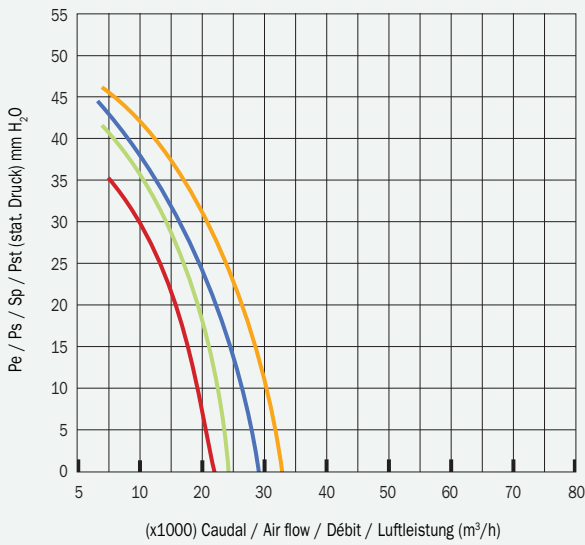


- 4-710 30 (1,15 kW)
- 4-710 34 (2,20 kW)
- 4-710 40 (3,00 kW)
- 4-710 45 (4,00 kW)

AXIAL 1400 RPM Ø 800

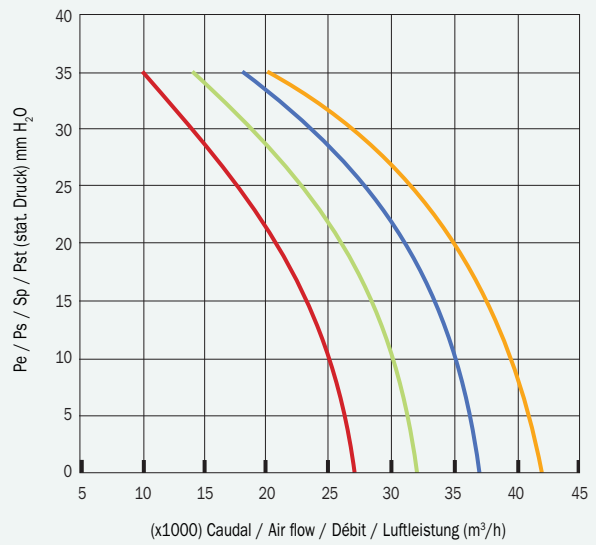


- 4-800 30 (4,00 kW)
- 4-800 34 (5,50 kW)
- 4-800 40 (7,50 kW)
- 4-800 45 (7,50 kW)

AXIAL 1400 RPM Ø 900

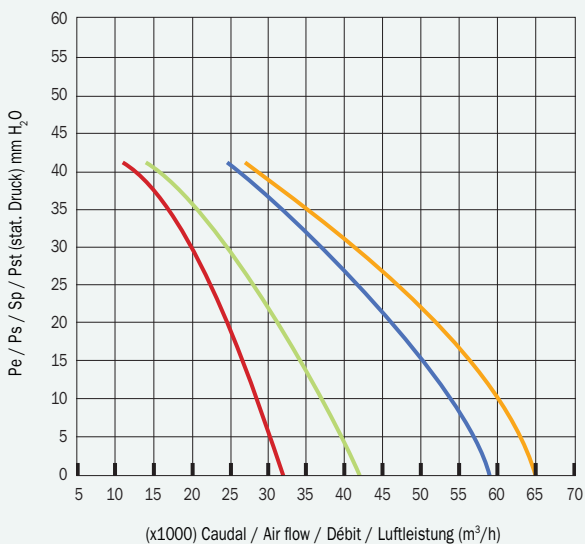

- 4-900 24 (5,50 kW)
- 4-900 30 (7,50 kW)
- 4-900 40 (11,00 kW)
- 4-900 45 (15,00 kW)


AXIAL 1400 RPM Ø 1000

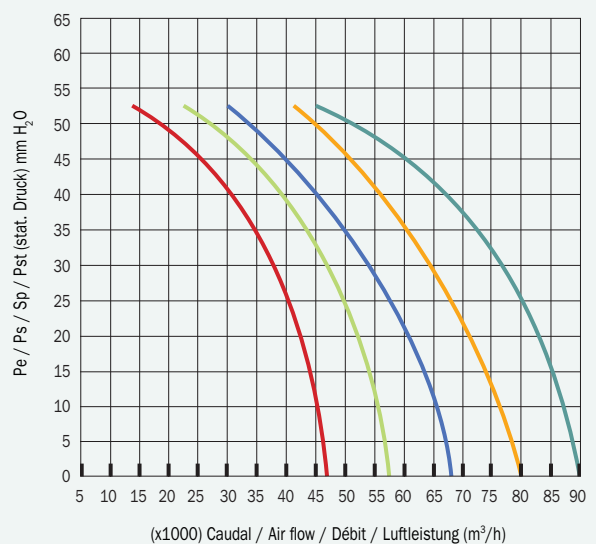

- 4-1000 24 (5,50 kW)
- 4-1000 30 (7,50 kW)
- 4-1000 34 (11,00 kW)
- 4-1000 40 (15,00 kW)
- 4-1000 45 (18,50 kW)


CURVAS CARACTERÍSTICAS / PERFORMANCE DATA / COURBES / KENNLINIEN

AXIAL 900 RPM Ø 400

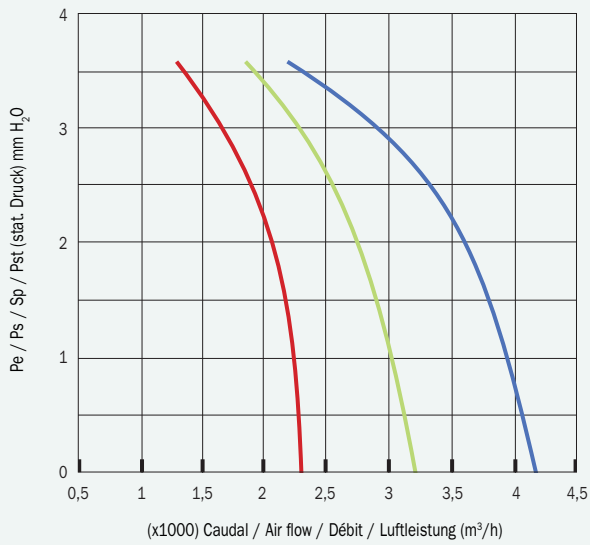


- 6-400 30 (0,09 kW)
- 6-400 40 (0,09 kW)
- 6-400 45 (0,09 kW)

AXIAL 900 RPM Ø 450

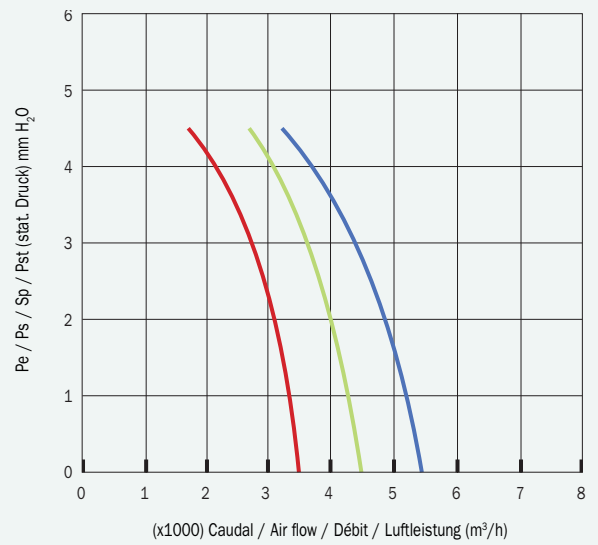


- 6-450 30 (0,12 kW)
- 6-450 40 (0,12 kW)
- 6-450 45 (0,12 kW)

AXIAL / AXIPLUS 900 RPM Ø 500

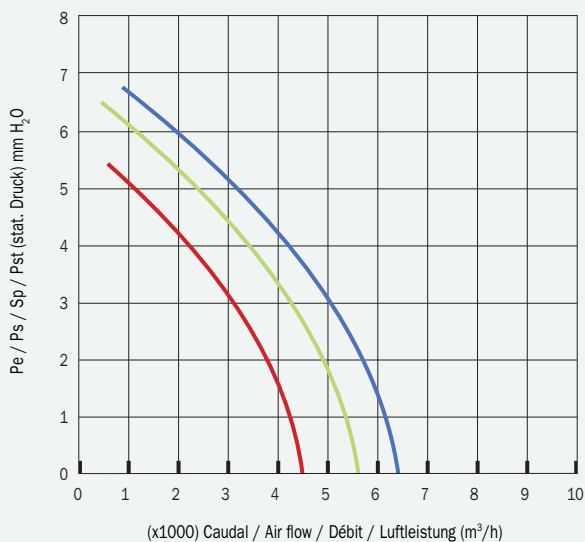

- 6-500 30 (0,18 kW)
- 6-500 34 (0,18 kW)
- 6-500 40 (0,18 kW)


AXIAL / AXIPLUS 900 RPM Ø 560

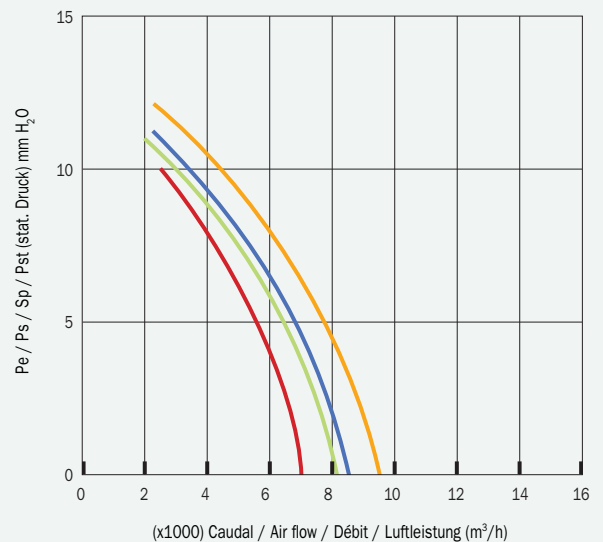

- 6-560 30 (0,12 kW)
- 6-560 34 (0,18 kW)
- 6-560 40 (0,25 kW)
- 6-560 45 (0,37 kW)


CURVAS CARACTERÍSTICAS / PERFORMANCE DATA / COURBES / KENNLINIEN

AXIAL / AXIPLUS 900 RPM Ø 630

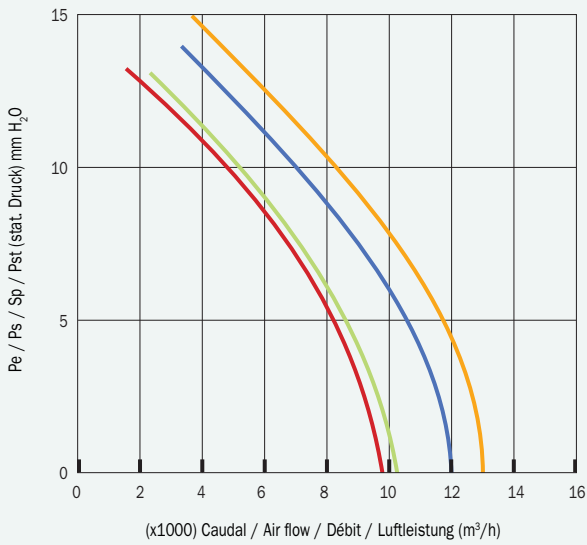


- 6-630 24 (0,18 kW)
- 6-630 30 (0,25 kW)
- 6-630 40 (0,37 kW)
- 6-630 45 (0,55 kW)

AXIAL 900 RPM Ø 710

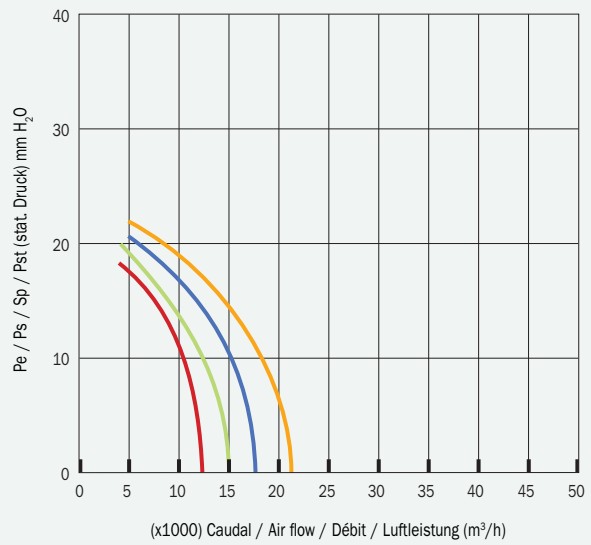


- 6-710 30 (0,37 kW)
- 6-710 34 (0,55 kW)
- 6-710 40 (0,75 kW)
- 6-710 45 (1,10 kW)

AXIAL 900 RPM Ø 800

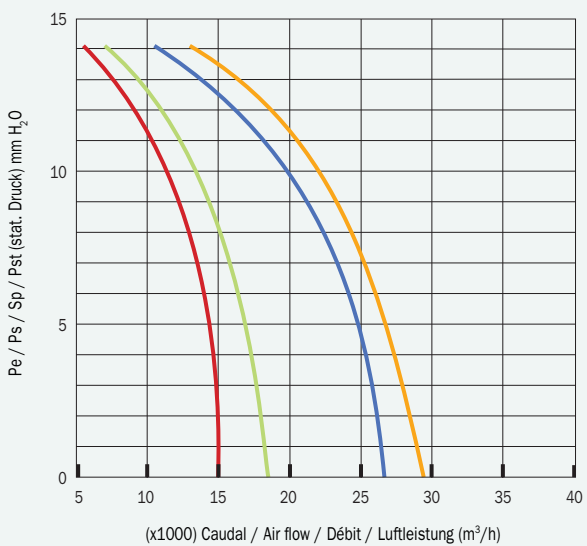

- 6-800 24 (0,37 kW)
- 6-800 30 (0,75 kW)
- 6-800 40 (1,10 kW)
- 6-800 45 (1,50 kW)


AXIAL 900 RPM Ø 900

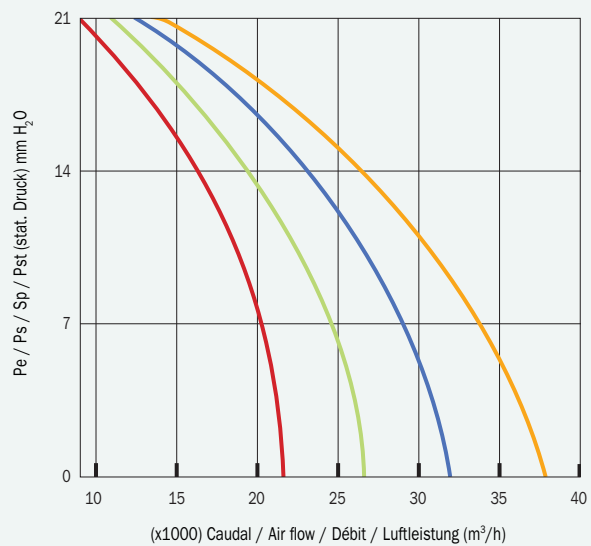

- 6-900 30 (0,75 kW)
- 6-900 34 (1,10 kW)
- 6-900 40 (1,50 kW)
- 6-900 45 (2,20 kW)


CURVAS CARACTERÍSTICAS / PERFORMANCE DATA / COURBES / KENNLINIEN

AXIAL 900 RPM Ø 1000

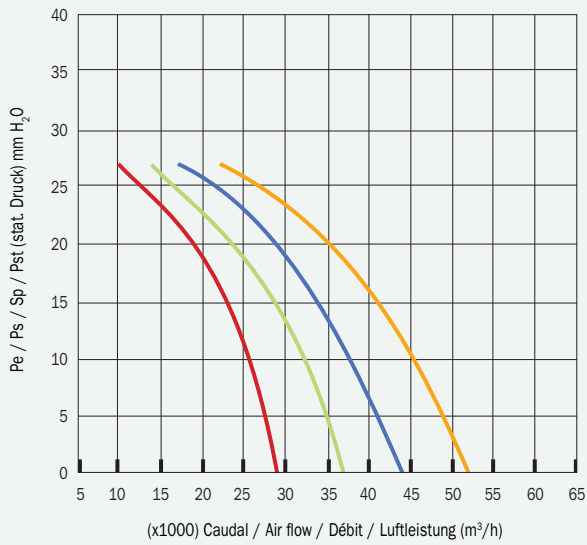


- 6-1000 24 (1,10 kW)
- 6-1000 30 (2,20 kW)
- 6-1000 34 (3,00 kW)
- 6-1000 40 (4,00 kW)

AXIAL 700 RPM Ø 800

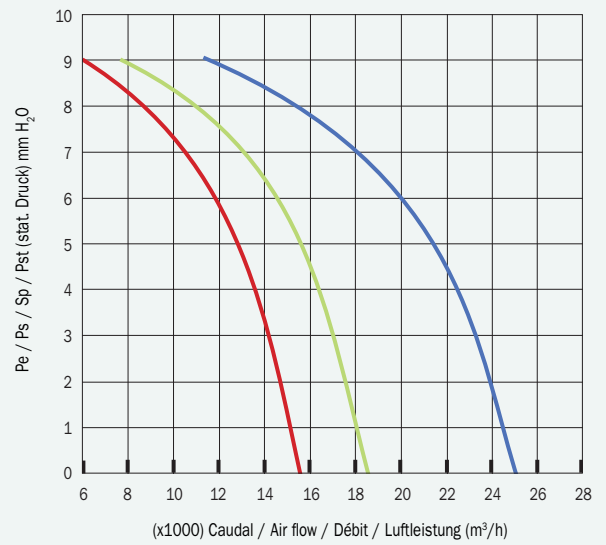


- 8-800 30 (0,37 kW)
- 8-800 34 (0,55 kW)
- 8-800 45 (1,10 kW)

AXIAL 700 RPM Ø 900

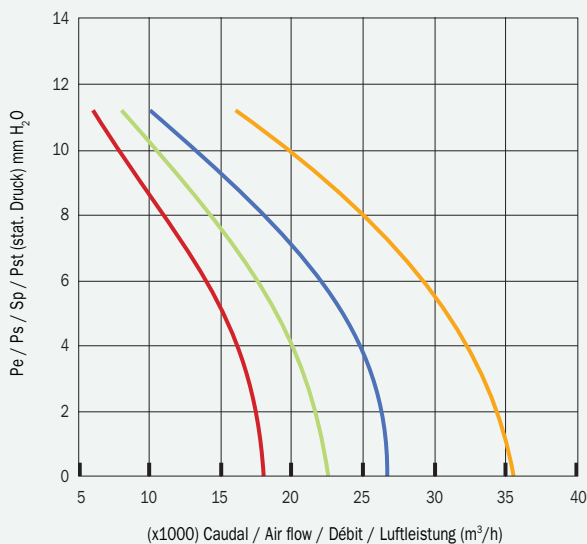

- 8-900 24 (0,37 kW)
- 8-900 30 (0,75 kW)
- 8-900 34 (1,10 kW)
- 8-900 45 (1,50 kW)

AXIAL 700 RPM Ø 1000

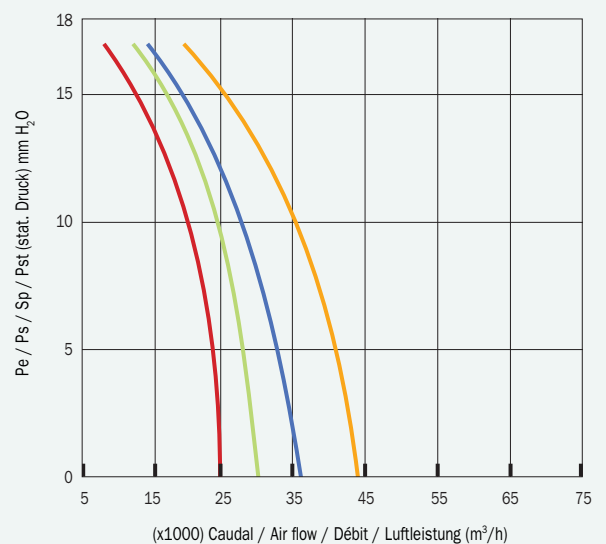

- 8-1000 24 (0,75 kW)
- 8-1000 30 (1,10 kW)
- 8-1000 34 (1,50 kW)
- 8-1000 40 (2,20 kW)