



CURVAS CARACTERÍSTICAS / PERFORMANCE DATA / COURBES / KENNLINIEN

AXIAL SOLID / AXITUB SOLID / AXITUB PIROS / PIROS BOX
2800 RPM Ø 513-355

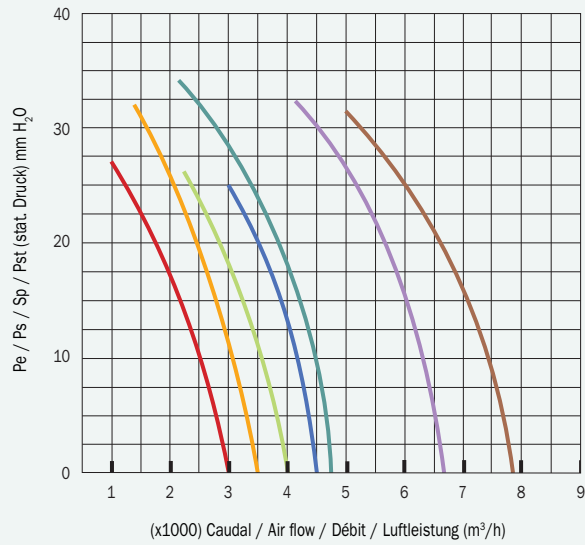


- 2-315 30-8 (0,55 kW)
- 2-355 24-8 (0,55 kW)
- 2-315 40-8 (0,75 kW)
- 2-355 30-8 (0,75 kW)
- 2-315 45-8 (1,10 kW)
- 2-355 40-8 (1,10 kW)
- 2-355 45-8 (1,50 kW)

AXIAL SOLID / AXITUB SOLID / PIROS BOX 2800 RPM Ø 400-450

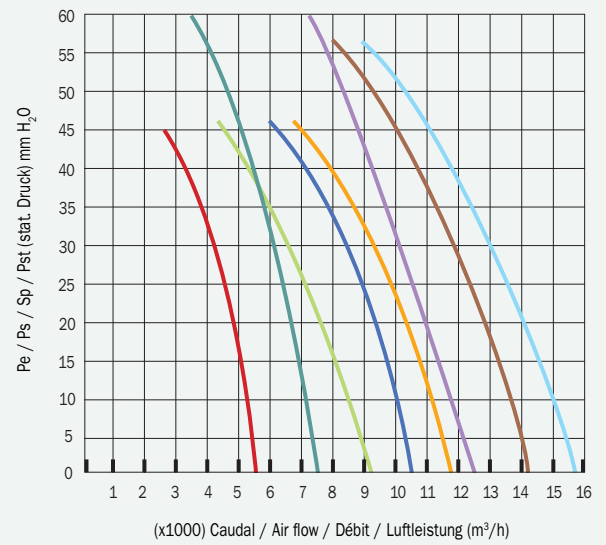


- 2-400 24-8 (1,10 kW)
- 2-450 24-8 (1,10 kW)
- 2-400 34-8 (1,50 kW)
- 2-450 34-8 (2,20 kW)
- 2-400 40-8 (2,20 kW)
- 2-450 40-8 (3,00 kW)
- 2-400 45-8 (3,00 kW)
- 2-450 45-8 (4,00 kW)

AXIAL SOLID / AXITUB SOLID 1400 RPM Ø 315-355

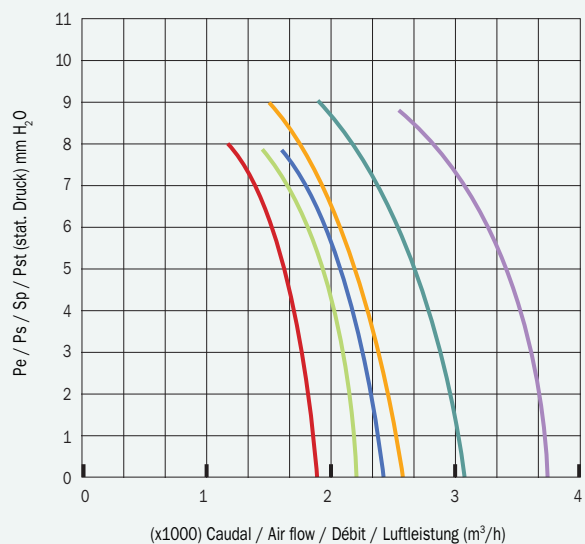

- 4-315 34-8 (0,12 kW)
- 4-355 30-8 (0,12 kW)
- 4-315 40-8 (0,12 kW)
- 4-355 34-8 (0,12 kW)
- 4-315 45-8 (0,18 kW)
- 4-355 45-8 (0,18 kW)


AXIAL SOLID / AXIAN SOLID / AXI BOX SOLID / AXITUB SOLID
1400 RPM Ø 400-500

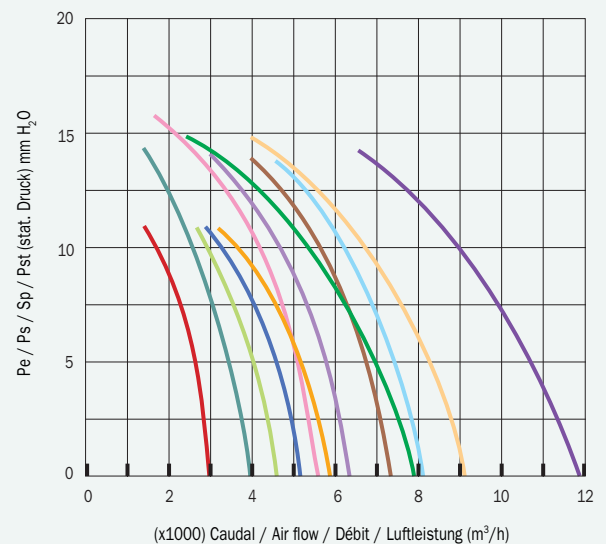

- 4-400 24-8 (0,12 kW)
- 4-450 24-8 (0,18 kW)
- 4-500 24-8 (0,25 kW)
- 4-400 34-8 (0,18 kW)
- 4-450 34-8 (0,25 kW)
- 4-500 30-8 (0,37 kW)
- 4-400 40-8 (0,25 kW)
- 4-450 40-8 (0,37 kW)
- 4-500 34-8 (0,55 kW)
- 4-400 45-8 (0,37 kW)
- 4-450 45-8 (0,55 kW)
- 4-500 45-8 (0,75 kW)


CURVAS CARACTERÍSTICAS / PERFORMANCE DATA / COURBES / KENNLINIEN

**AXIAN PIROS / AXITUB PIROS / PIROS BOX 1400 RPM
Ø 400-500**

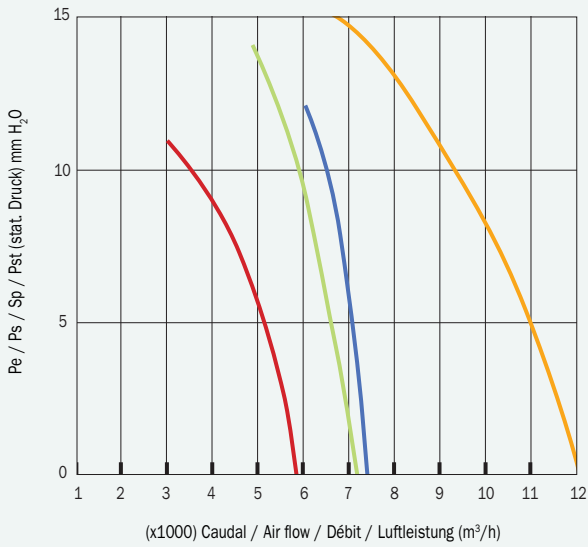


- 4-400 45-8 (0,55 kW)
- 4-450 40-8 (0,55 kW)
- 4-500 30-8 (0,55 kW)
- 4-500 45-8 (0,75 kW)

**AXIAL SOLID / AXIAN SOLID / AXI BOX SOLID / AXITUB SOLID /
AXIAN PIROS / AXITUB PIROS / PIROS BOX 1400 RPM Ø 560**

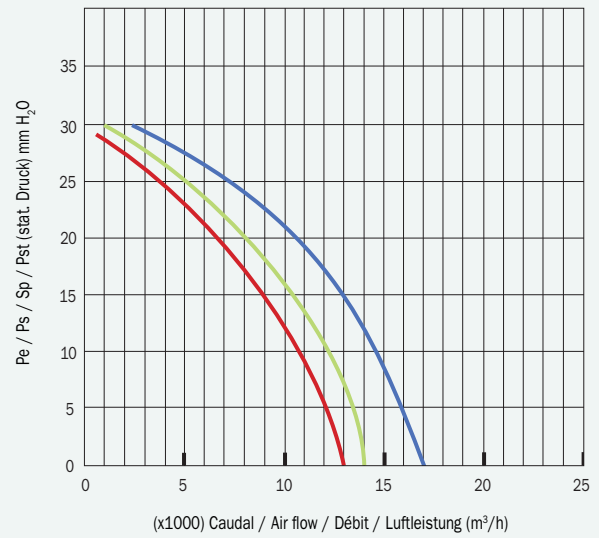


- 4-560 30-6 (0,75 kW)
- 4-560 40-6 (1,10 kW)
- 4-560 45-6 (1,50 kW)

**AXIAN SOLID / AXI BOX SOLID / AXITUB SOLID / AXIAN PIROS /
AXITUB PIROS / PIROS BOX 1400 RPM Ø 630**

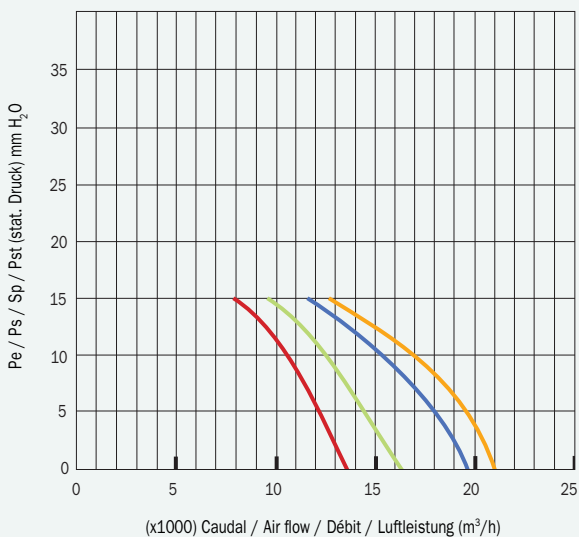

- 4-630 24-3 (0,55 kW)
- 4-630 30-3 (0,75 kW)
- 4-630 40-3 (1,10 kW)
- 4-630 45-3 (1,50 kW)


**AXIAN SOLID / AXI BOX SOLID / AXITUB SOLID / AXIAN PIROS /
AXITUB PIROS / PIROS BOX 1400 RPM Ø 630**

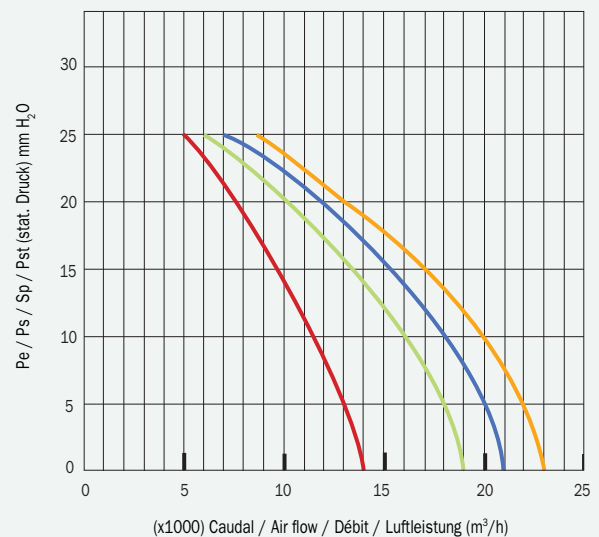

- 4-630 24-4 (0,75 kW)
- 4-630 34-4 (1,10 kW)
- 4-630 40-4 (1,50 kW)
- 4-630 45-4 (2,20 kW)


CURVAS CARACTERÍSTICAS / PERFORMANCE DATA / COURBES / KENNLINIEN

AXIAL SOLID / AXIAN SOLID / AXI BOX SOLID / AXITUB SOLID / AXIAN PIROS / AXITUB PIROS / PIROS BOX 1400 RPM Ø 630

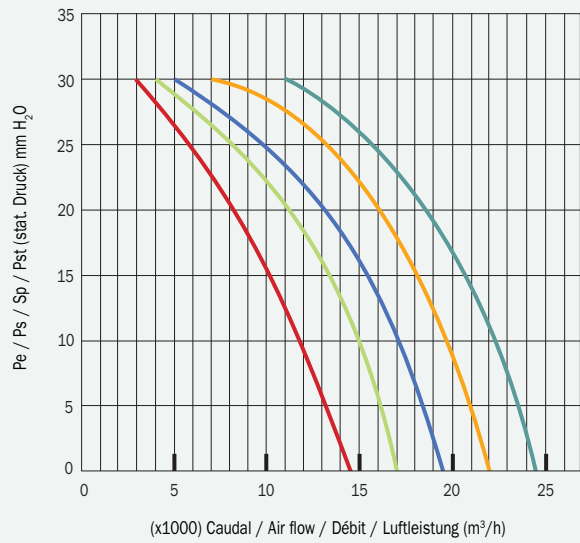


- 4-630 24-6 (0,75 kW)
- 4-630 30-6 (1,10 kW)
- 4-630 34-6 (1,50 kW)
- 4-630 40-6 (2,20 kW)
- 4-630 45-6 (3,00 kW)

AXIAN SOLID / AXI BOX SOLID / AXITUB SOLID / AXIAN PIROS / AXITUB PIROS / PIROS BOX 1400 RPM Ø 710

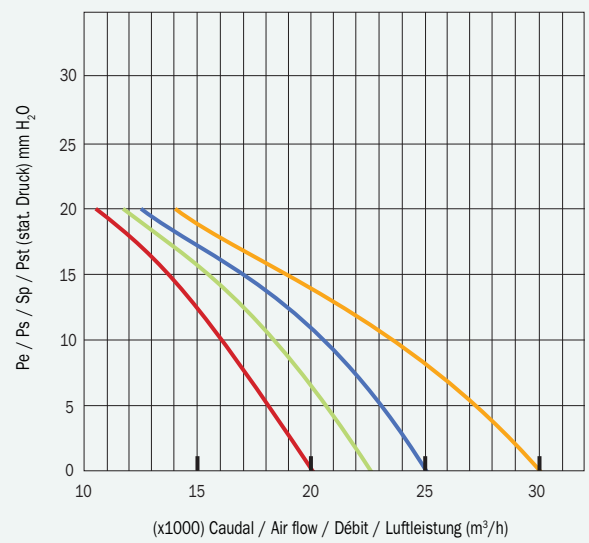


- 4-710 24-3 (0,75 kW)
- 4-710 30-3 (1,10 kW)
- 4-710 34-3 (1,50 kW)
- 4-710 45-3 (2,20 kW)

AXIAL SOLID / AXI BOX SOLID / AXITUB SOLID / AXIAN PIROS / AXITUB PIROS / PIROS BOX 1400 RPM Ø 710

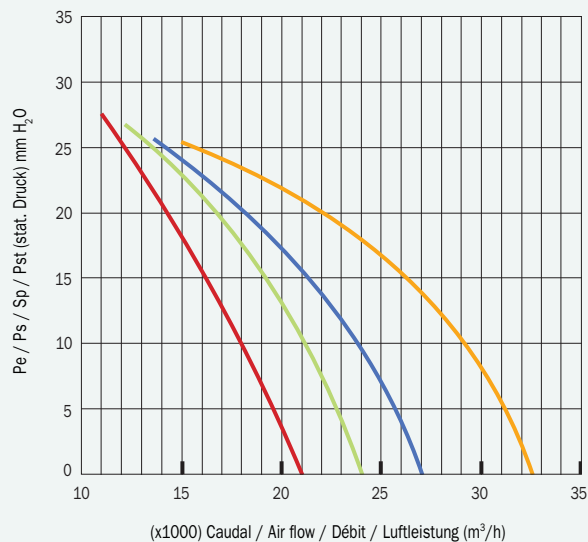

- 4-710 24-4 (1,10 kW)
- 4-710 30-4 (1,50 kW)
- 4-710 34-4 (2,20 kW)
- 4-710 45-4 (3,00 kW)


AXIAL SOLID / AXIAN SOLID / AXI BOX SOLID / AXITUB SOLID / AXIAN PIROS / AXITUB PIROS / PIROS BOX 1400 RPM Ø 710

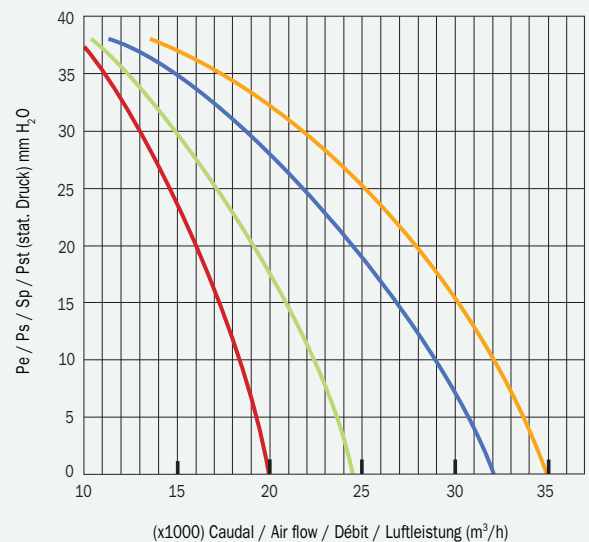

- 4-710 24-6 (2,20 kW)
- 4-710 30-6 (2,20 kW)
- 4-710 40-6 (4,00 kW)
- 4-710 45-6 (5,50 kW)


CURVAS CARACTERÍSTICAS / PERFORMANCE DATA / COURBES / KENNLINIEN

AXIAN SOLID / AXI BOX SOLID / AXITUB SOLID / AXIAN PIROS / AXITUB PIROS / PIROS BOX 1400 RPM Ø 800

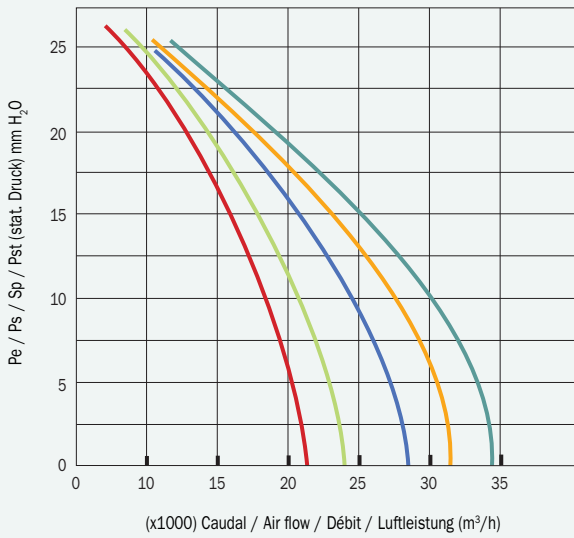


- 4-800 24-3 (2,20 kW)
- 4-800 30-3 (2,20 kW)
- 4-800 34-3 (3,00 kW)
- 4-800 40-3 (4,00 kW)
- 4-800 45-3 (5,50 kW)

AXIAN SOLID / AXI BOX SOLID / AXITUB SOLID / AXIAN PIROS / AXITUB PIROS / PIROS BOX 1400 RPM Ø 800

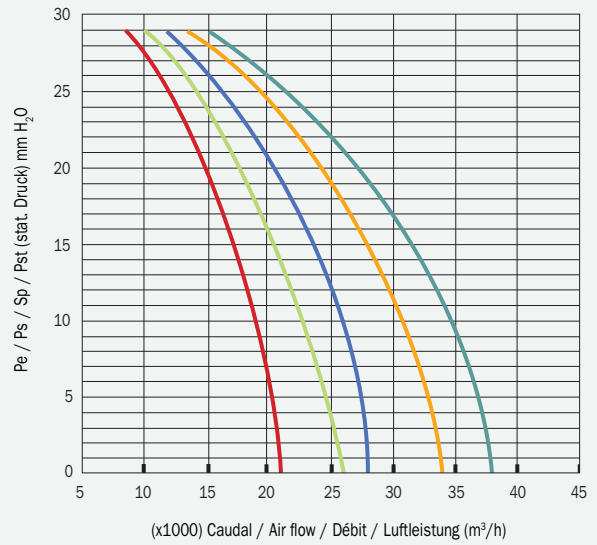


- 4-800 24-4 (2,20 kW)
- 4-800 30-4 (3,00 kW)
- 4-800 34-4 (4,00 kW)
- 4-800 40-4 (5,50 kW)
- 4-800 45-4 (5,50 kW)

AXIAL SOLID / AXIAN SOLID / AXI BOX SOLID / AXITUB SOLID / AXIAN PIROS / AXITUB PIROS / PIROS BOX 1400 RPM Ø 800

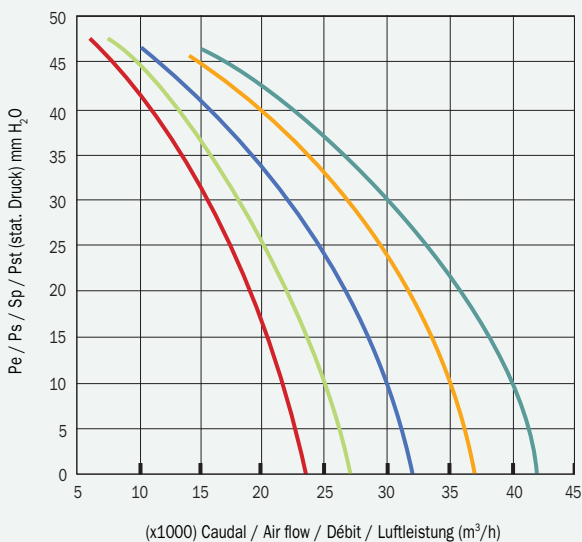

- 4-800 24-6 (4,00 kW)
- 4-800 30-6 (4,00 kW)
- 4-800 34-6 (5,50 kW)
- 4-800 40-6 (7,50 kW)
- 4-800 45-6 (7,50 kW)


AXIAN SOLID / AXI BOX SOLID / AXITUB SOLID / AXIAN PIROS / PIROS BOX 1400 RPM Ø 800

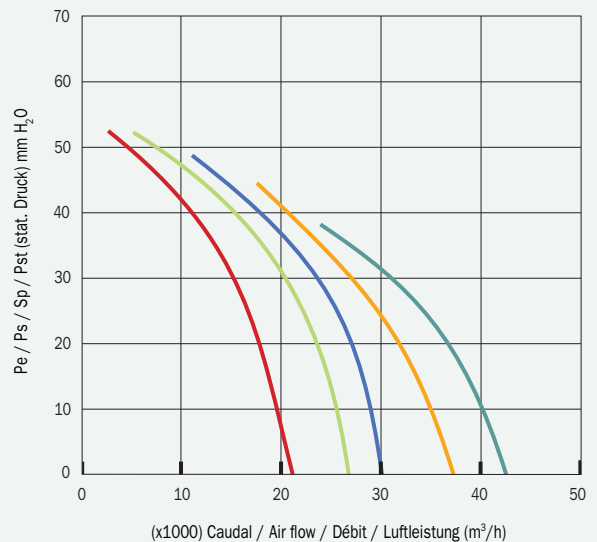

- 4-800 24-9 (3,00 kW)
- 4-800 30-9 (4,00 kW)
- 4-800 34-9 (5,50 kW)
- 4-800 40-9 (7,50 kW)
- 4-800 45-9 (7,50 kW)


CURVAS CARACTERÍSTICAS / PERFORMANCE DATA / COURBES / KENNLINIEN

AXIAL SOLID / AXIAN SOLID / AXI BOX SOLID / AXITUB SOLID / AXIAN PIROS / PIROS BOX 1400 RPM Ø 800

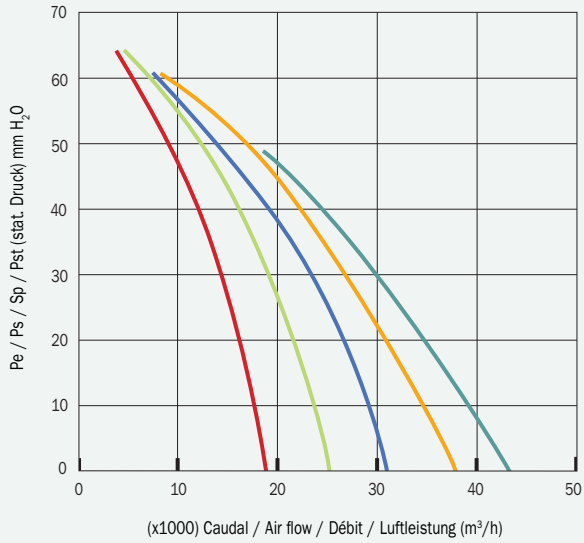


- 4-800 24-12 (4,00 kW)
- 4-800 30-12 (5,50 kW)
- 4-800 34-12 (5,50 kW)
- 4-800 40-12 (7,50 kW)
- 4-800 45-12 (7,50 kW)

AXIAL SOLID / AXI BOX SOLID / AXITUB SOLID / AXIAN PIROS / AXITUB PIROS / PIROS BOX 1400 RPM Ø 900

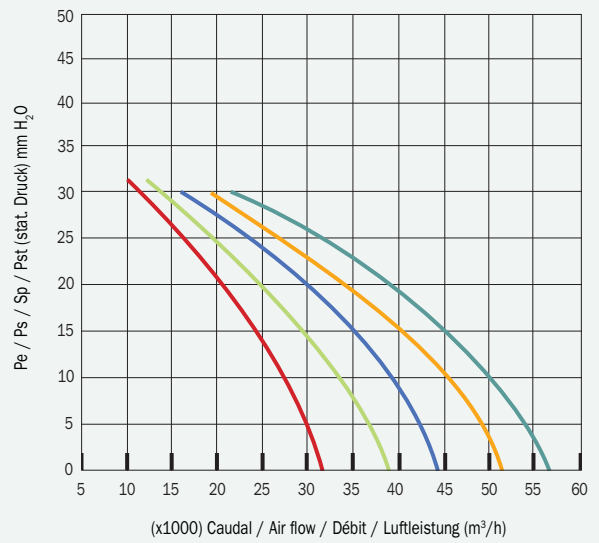


- 4-900 24-3 (2,20 kW)
- 4-900 30-3 (4,00 kW)
- 4-900 34-3 (5,50 kW)
- 4-900 40-3 (7,50 kW)
- 4-900 45-3 (7,50 kW)

AXIAL SOLID / AXI BOX SOLID / AXITUB SOLID / AXIAN PIROS / AXITUB PIROS / PIROS BOX 1400 RPM Ø 900

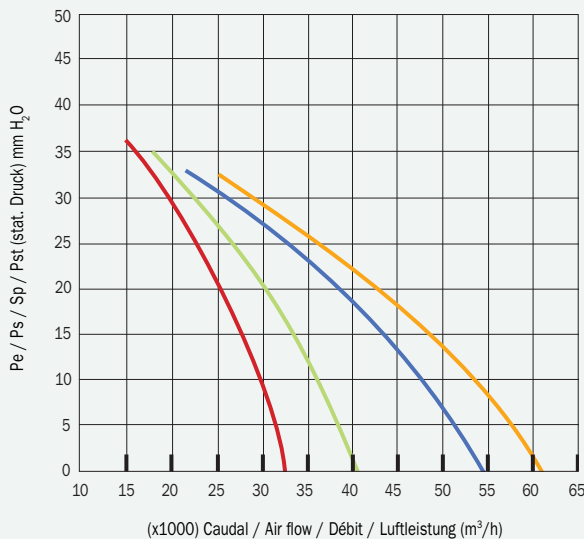

- 4-900 24-4 (4,00 kW)
- 4-900 30-4 (5,50 kW)
- 4-900 40-4 (7,50 kW)
- 4-900 45-4 (11,00 kW)


AXIAL SOLID / AXIAN SOLID / AXI BOX SOLID / AXITUB SOLID / AXIAN PIROS / AXITUB PIROS / PIROS BOX 1400 RPM Ø 900

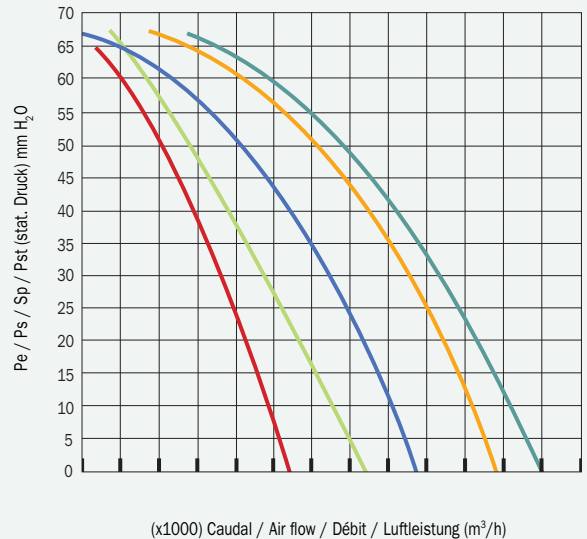

- 4-900 24-6 (4,00 kW)
- 4-900 30-6 (5,50 kW)
- 4-900 34-6 (7,50 kW)
- 4-900 40-6 (11,00 kW)
- 4-900 45-6 (15,00 kW)


CURVAS CARACTERÍSTICAS / PERFORMANCE DATA / COURBES / KENNLINIEN

AXIAN SOLID / AXI BOX SOLID / AXITUB SOLID / AXIAN PIROS / PIROS BOX 1400 RPM Ø 900

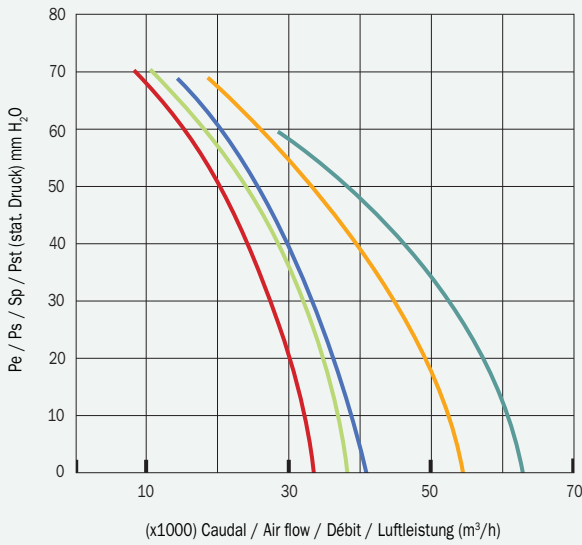


- 4-900 24-9 (7,50 kW)
- 4-900 30-9 (7,50 kW)
- 4-900 34-9 (11,00 kW)
- 4-900 40-9 (15,00 kW)
- 4-900 45-9 (15,00 kW)

AXIAL SOLID / AXIAN SOLID / AXI BOX SOLID / AXITUB SOLID / AXIAN PIROS / PIROS BOX 1400 RPM Ø 900

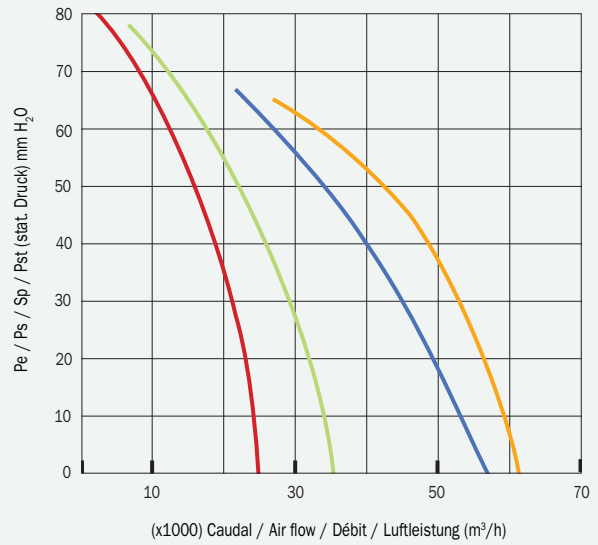


- 4-900 24-12 (7,50 kW)
- 4-900 30-12 (11,00 kW)
- 4-900 40-12 (15,00 kW)
- 4-900 45-12 (18,50 kW)

AXIAN SOLID / AXI BOX SOLID / AXITUB SOLID / AXIAN PIROS / AXITUB PIROS / PIROS BOX 1400 RPM Ø 1000

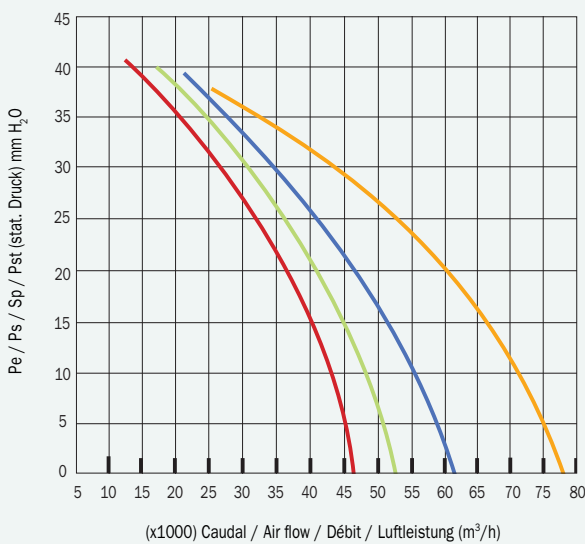

- 4-1000 24-3 (3,00 kW)
- 4-1000 30-3 (4,00 kW)
- 4-1000 40-3 (5,50 kW)
- 4-1000 45-3 (11,00 kW)


AXIAL SOLID / AXIAN SOLID / AXI BOX SOLID / AXITUB SOLID / AXIAN PIROS / AXITUB PIROS / PIROS BOX 1400 RPM Ø 1000

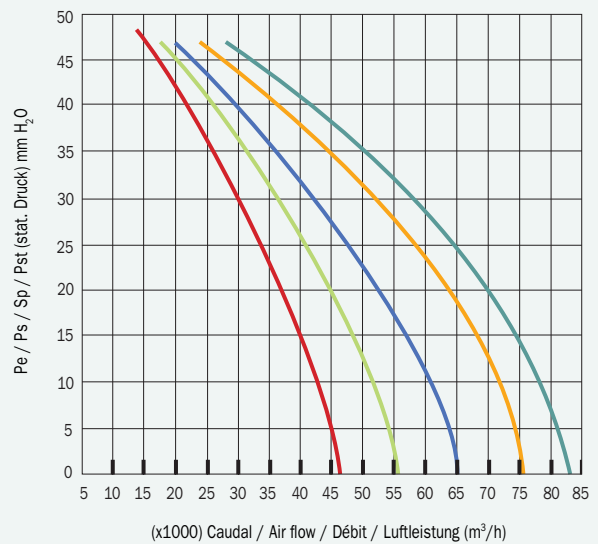

- 4-1000 24-4 (4,00 kW)
- 4-1000 30-4 (5,50 kW)
- 4-1000 34-4 (7,50 kW)
- 4-1000 40-4 (11,00 kW)
- 4-1000 45-4 (15,00 kW)


CURVAS CARACTERÍSTICAS / PERFORMANCE DATA / COURBES / KENNLINIEN

AXIAL SOLID / AXIAN SOLID / AXI BOX SOLID / AXITUB SOLID / AXIAN PIROS / AXITUB PIROS / PIROS BOX 1400 RPM Ø 1000

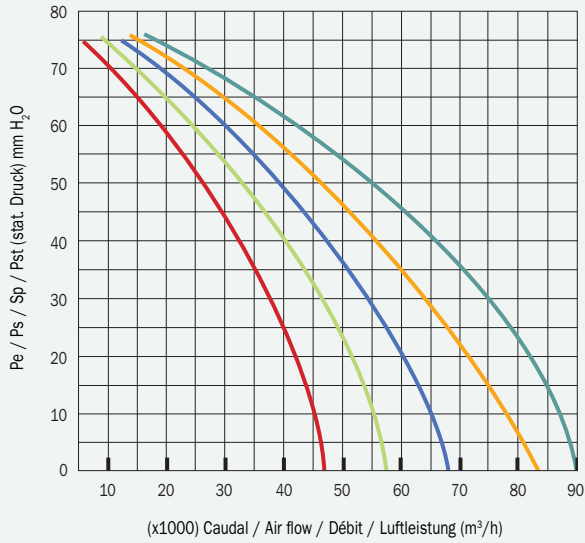


- 4-1000 24-6 (5,50 kW)
- 4-1000 30-6 (7,50 kW)
- 4-1000 34-6 (11,00 kW)
- 4-1000 40-6 (15,00 kW)
- 4-1000 45-6 (18,50 kW)

AXIAL SOLID / AXI BOX SOLID / AXITUB SOLID / AXIAN PIROS / PIROS BOX 1400 RPM Ø 1000

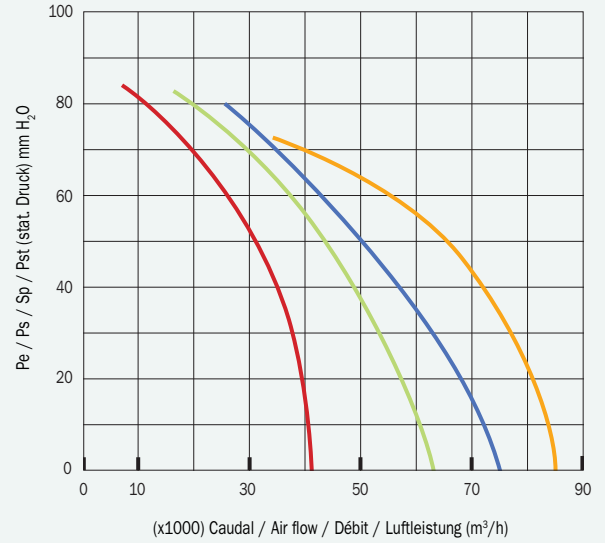


- 4-1000 24-9 (7,50 kW)
- 4-1000 34-9 (11,00 kW)
- 4-1000 40-9 (18,50 kW)
- 4-1000 45-9 (22,00 kW)

AXIAL SOLID / AXIAN SOLID / AXI BOX SOLID / AXITUB SOLID / AXIAN PIROS / PIROS BOX 1400 RPM Ø 1000

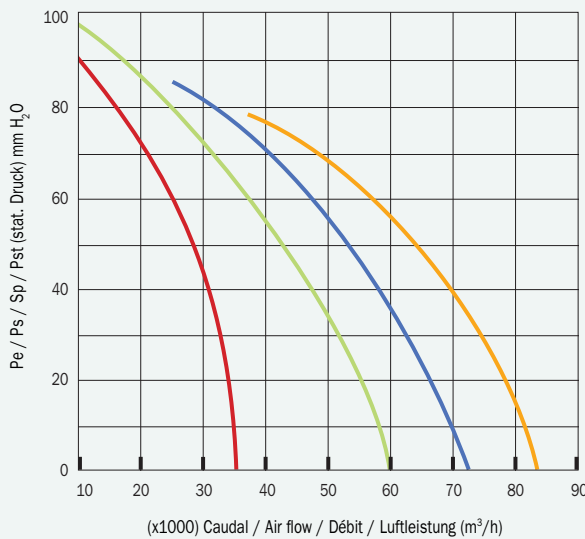

- 4-1000 24-12 (11,00 kW)
- 4-1000 34-12 (15,00 kW)
- 4-1000 40-12 (22,00 kW)
- 4-1000 45-12 (22,00 kW)


AXIAL SOLID / AXI BOX SOLID / AXITUB SOLID / AXIAN PIROS / AXITUB PIROS / PIROS BOX 1400 RPM Ø 1250

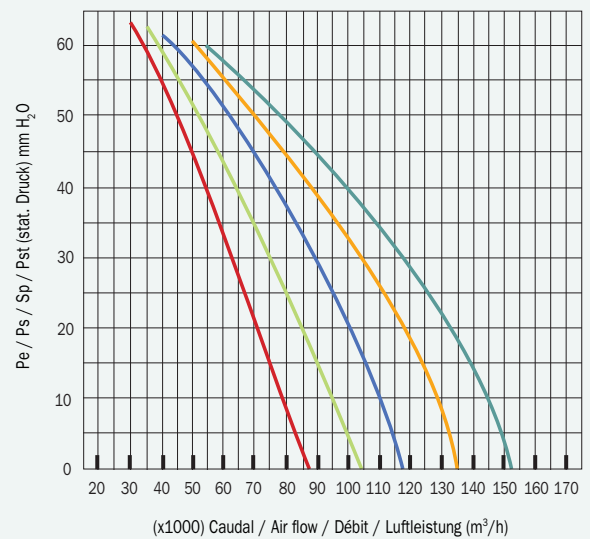

- 4-1250 24-3 (11,00 kW)
- 4-1250 30-3 (15,00 kW)
- 4-1250 34-3 (18,50 kW)
- 4-1250 40-3 (30,00 kW)
- 4-1250 45-3 (37,00 kW)


CURVAS CARACTERÍSTICAS / PERFORMANCE DATA / COURBES / KENNLINIEN

AXIAN SOLID / AXI BOX SOLID / AXITUB SOLID / AXIAN PIROS / AXITUB PIROS / PIROS BOX 1400 RPM Ø 1250

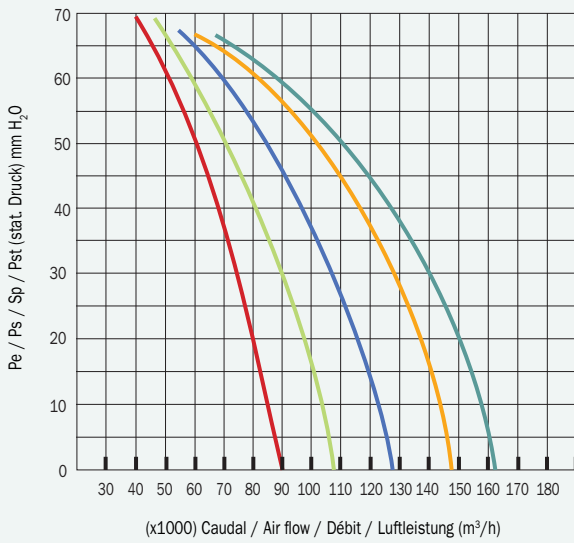


- 4-1250 24-4 (11,00 kW)
- 4-1250 30-4 (18,50 kW)
- 4-1250 34-4 (22,00 kW)
- 4-1250 40-4 (30,00 kW)
- 4-1250 45-4 (45,00 kW)

AXIAN SOLID / AXI BOX SOLID / AXITUB SOLID / AXIAN PIROS / AXITUB PIROS / PIROS BOX 1400 RPM Ø 1250

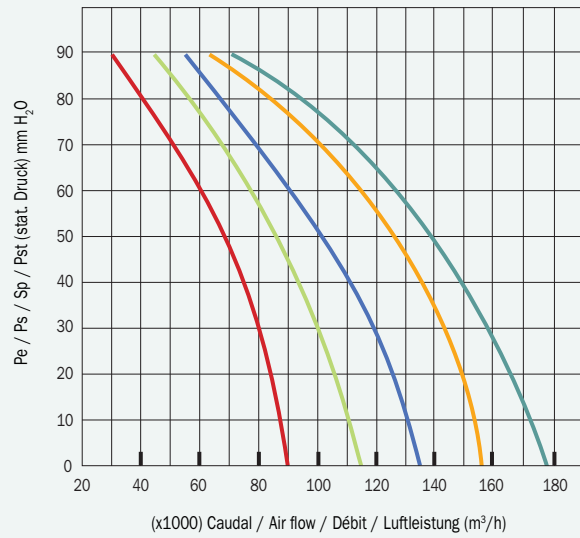


- 4-1250 24-6 (15,00 kW)
- 4-1250 30-6 (22,00 kW)
- 4-1250 34-6 (30,00 kW)
- 4-1250 40-6 (45,00 kW)
- 4-1250 45-6 (55,00 kW)

AXIAN SOLID / AXI BOX SOLID / AXITUB SOLID / AXIAN PIROS / PIROS BOX 1400 RPM Ø 1250

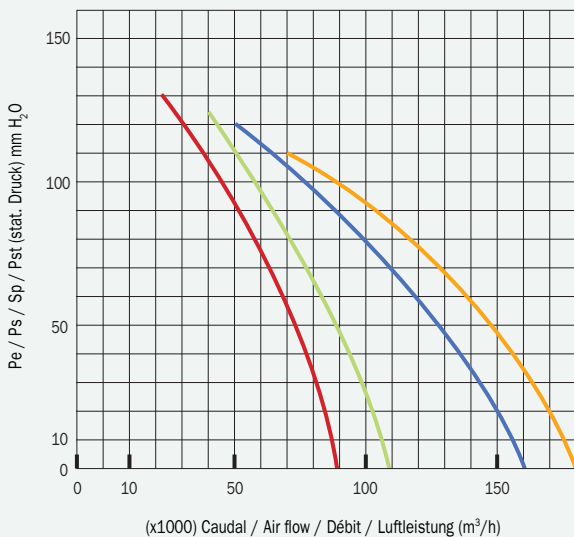

- 4-1250 24-9 (18,50 kW)
- 4-1250 34-9 (30,00 kW)
- 4-1250 40-9 (45,00 kW)
- 4-1250 45-9 (75,00 kW)


AXIAN SOLID / AXI BOX SOLID / AXITUB SOLID / AXIAN PIROS / PIROS BOX 1400 RPM Ø 1250

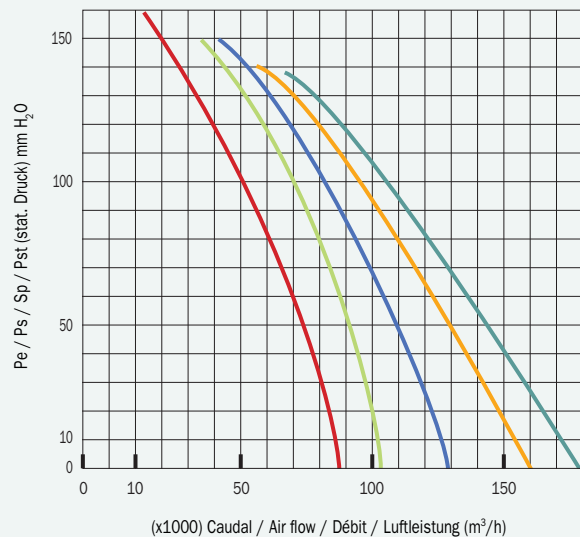

- 4-1250 24-12 (22,00 kW)
- 4-1250 30-12 (30,00 kW)
- 4-1250 34-12 (37,00 kW)
- 4-1250 40-12 (55,00 kW)
- 4-1250 45-12 (75,00 kW)


CURVAS CARACTERÍSTICAS / PERFORMANCE DATA / COURBES / KENNLINIEN

AXIAN PIROS / AXITUB PIROS / PIROS BOX 900 RPM Ø 630

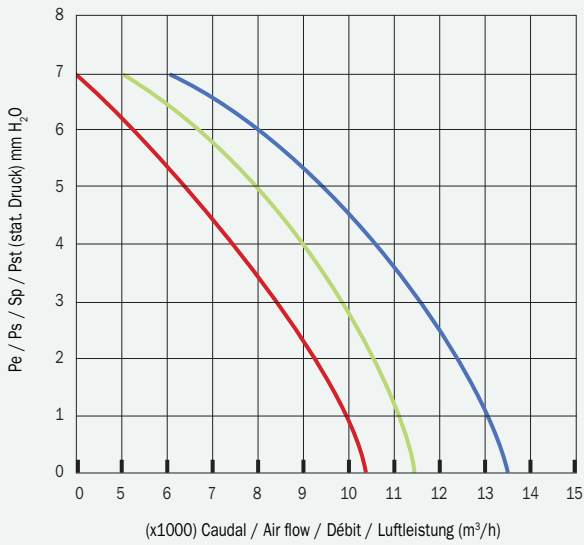


- 6-630 30-3 (0,55 kW)
- 6-630 34-3 (0,55 kW)
- 6-630 45-3 (0,55 kW)

AXIAN SOLID / AXI BOX SOLID / AXITUB SOLID 900 RPM Ø 630

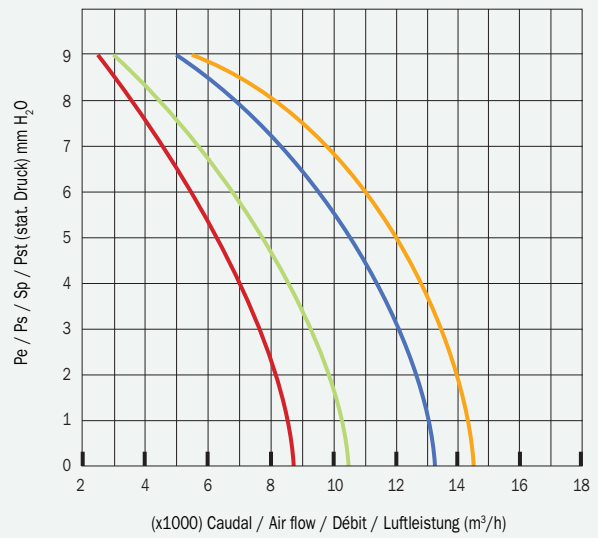


- 6-630 24-4 (0,18 kW)
- 6-630 30-4 (0,25 kW)
- 6-630 40-4 (0,37 kW)
- 6-630 45-4 (0,55 kW)

AXIAN PIROS / AXITUB PIROS / PIROS BOX 900 RPM Ø 630

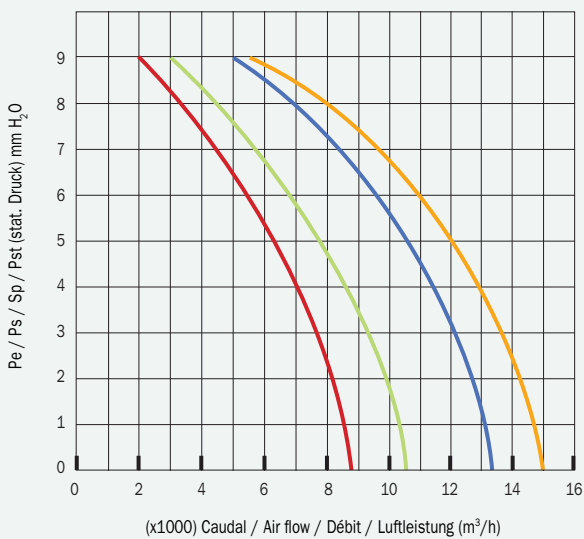

- 6-630 24-4 (0,55 kW)
- 6-630 30-4 (0,55 kW)
- 6-630 40-4 (0,55 kW)
- 6-630 45-4 (0,55 kW)


AXIAL SOLID / AXIAN SOLID / AXI BOX SOLID / AXITUB SOLID 900 RPM Ø 630

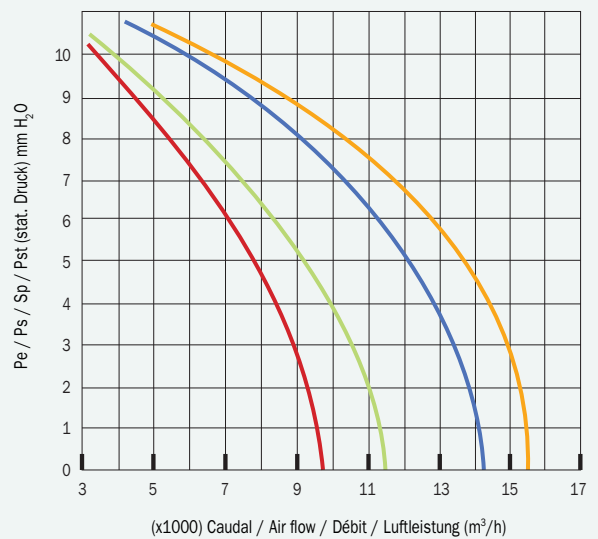

- 6-630 24-6 (0,25 kW)
- 6-630 30-6 (0,37 kW)
- 6-630 40-6 (0,55 kW)
- 6-630 45-6 (0,75 kW)


CURVAS CARACTERÍSTICAS / PERFORMANCE DATA / COURBES / KENNLINIEN

AXIAN PIROS / AXITUB PIROS / PIROS BOX 900 RPM Ø 630

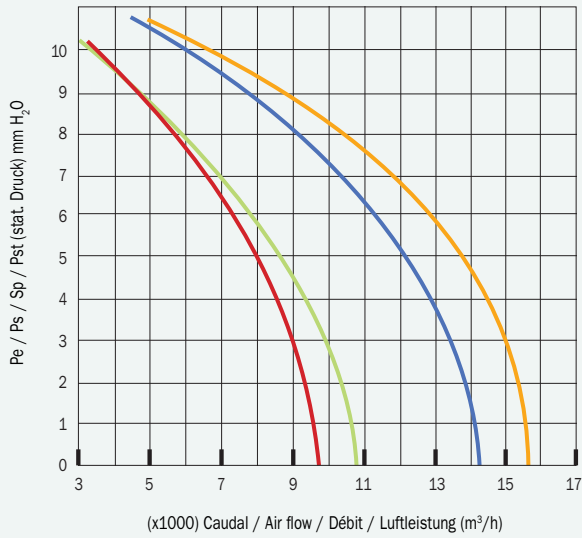


- 6-630 24-6 (0,55 kW)
- 6-630 30-6 (0,55 kW)
- 6-630 40-6 (0,55 kW)
- 6-630 45-6 (0,75 kW)

AXIAN SOLID / AXI BOX SOLID / AXITUB SOLID 900 RPM Ø 710

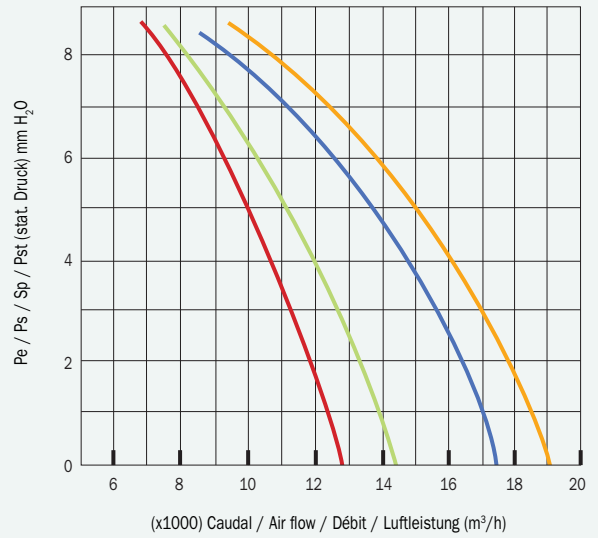


- 6-710 24-3 (0,25 kW)
- 6-710 30-3 (0,37 kW)
- 6-710 40-3 (0,55 kW)
- 6-710 45-3 (0,75 kW)

AXIAN PIROS / AXITUB PIROS / PIROS BOX 900 RPM Ø 710

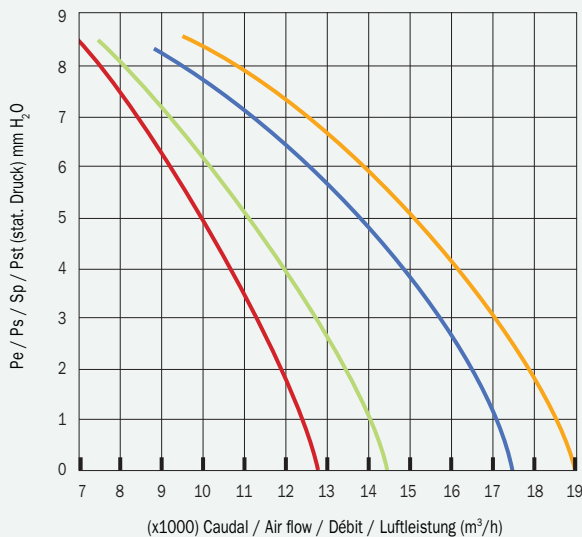

- 6-710 24-3 (0,55 kW)
- 6-710 30-3 (0,55 kW)
- 6-710 40-3 (0,55 kW)
- 6-710 45-3 (0,75 kW)


AXIAN SOLID / AXI BOX SOLID / AXITUB SOLID 900 RPM Ø 710

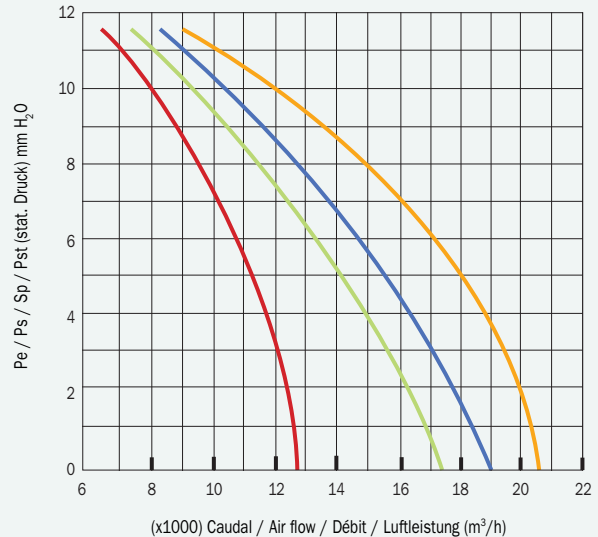

- 6-710 24-4 (0,37 kW)
- 6-710 30-4 (0,55 kW)
- 6-710 40-4 (0,75 kW)
- 6-710 45-4 (1,10 kW)


CURVAS CARACTERÍSTICAS / PERFORMANCE DATA / COURBES / KENNLINIEN

AXIAN PIROS / AXITUB PIROS / PIROS BOX 900 RPM Ø 710

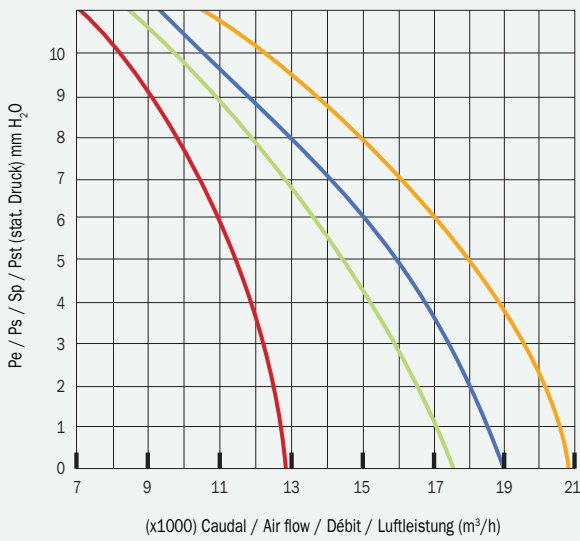


- 6-710 24-4 (0,55 kW)
- 6-710 30-4 (0,55 kW)
- 6-710 40-4 (0,75 kW)
- 6-710 45-4 (1,10 kW)

AXIAL SOLID / AXIAN SOLID / AXI BOX SOLID / AXITUB SOLID 900 RPM Ø 710

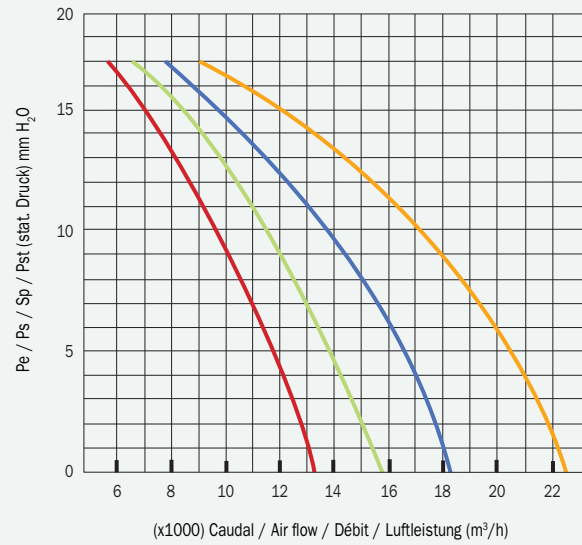


- 6-710 24-6 (0,37 kW)
- 6-710 30-6 (0,55 kW)
- 6-710 40-6 (0,75 kW)
- 6-710 45-6 (1,10 kW)

AXIAN PIROS / AXITUB PIROS / PIROS BOX 900 RPM Ø 710

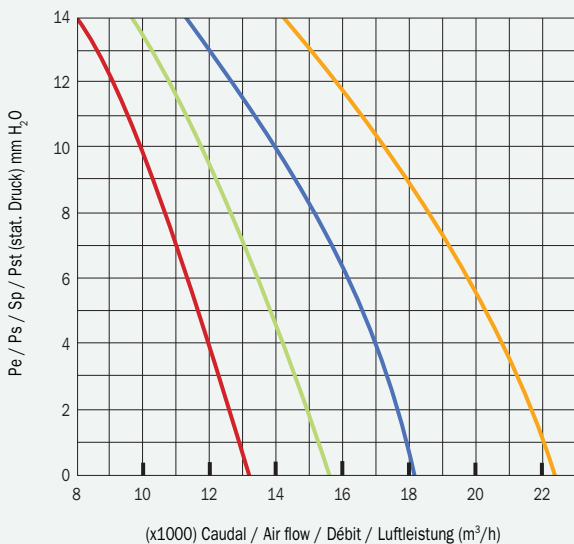

- 6-710 24-6 (0,55 kW)
- 6-710 30-6 (0,55 kW)
- 6-710 40-6 (0,75 kW)
- 6-710 45-6 (1,10 kW)


AXIAN SOLID / AXI BOX SOLID / AXITUB SOLID 900 RPM Ø 800

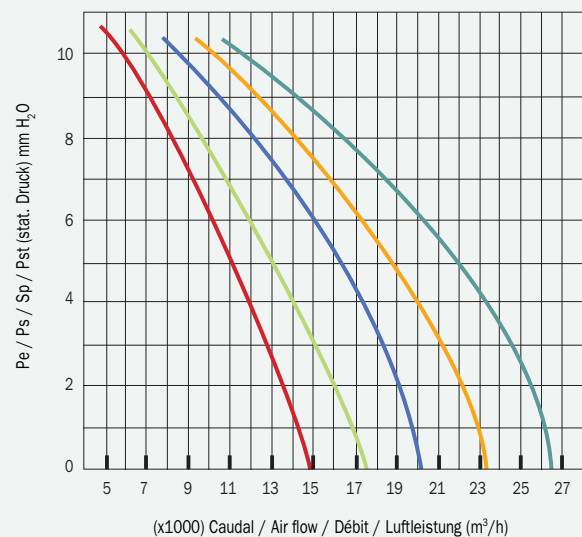

- 6-800 24-3 (0,25 kW)
- 6-800 30-3 (0,37 kW)
- 6-800 34-3 (0,55 kW)
- 6-800 40-3 (0,75 kW)
- 6-800 45-3 (1,10 kW)


CURVAS CARACTERÍSTICAS / PERFORMANCE DATA / COURBES / KENNLINIEN

AXIAN PIROS / AXITUB PIROS / PIROS BOX 900 RPM Ø 800

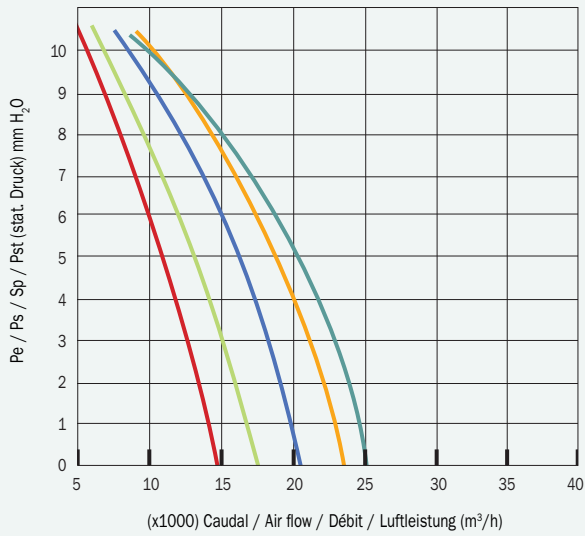


- 6-800 24-3 (0,55 kW)
- 6-800 30-3 (0,55 kW)
- 6-800 34-3 (0,55 kW)
- 6-800 40-3 (0,75 kW)
- 6-800 45-3 (1,10 kW)

AXIAN SOLID / AXI BOX SOLID / AXITUB SOLID 900 RPM Ø 800

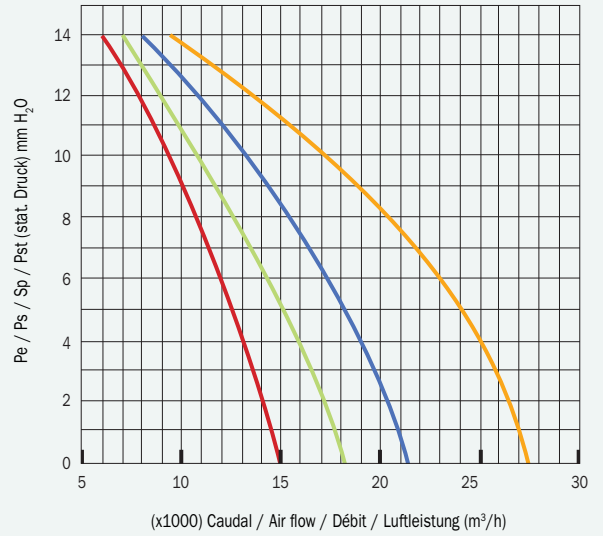


- 6-800 24-4 (0,37 kW)
- 6-800 30-4 (0,55 kW)
- 6-800 34-4 (0,75 kW)
- 6-800 45-4 (1,10 kW)

AXIAN PIROS / AXITUB PIROS / PIROS BOX 900 RPM Ø 800

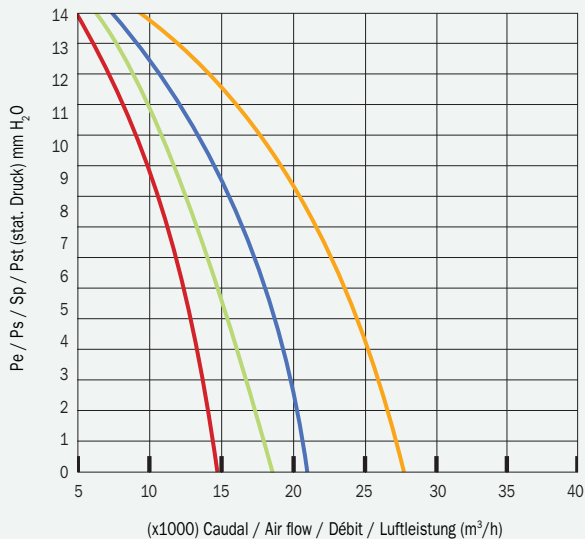

- 6-800 24-4 (0,55 kW)
- 6-800 30-4 (0,55 kW)
- 6-800 40-4 (0,75 kW)
- 6-800 45-4 (1,10 kW)


AXIAL SOLID / AXIAN SOLID / AXI BOX SOLID / AXITUB SOLID 900 RPM Ø 800

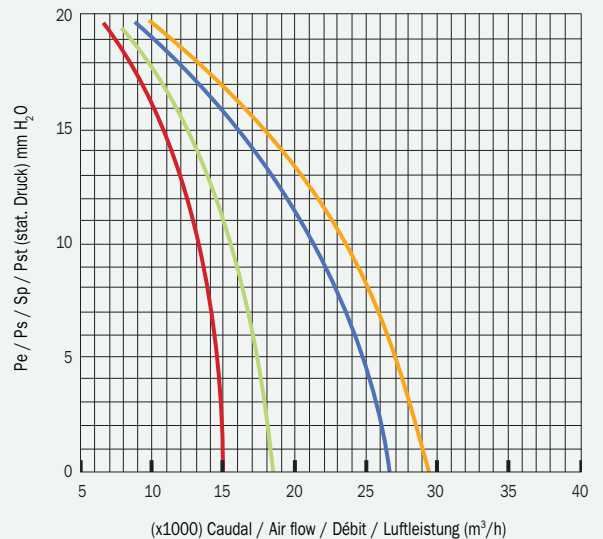

- 6-800 24-6 (0,37 kW)
- 6-800 30-6 (0,75 kW)
- 6-800 34-6 (1,10 kW)
- 6-800 45-6 (1,50 kW)


CURVAS CARACTERÍSTICAS / PERFORMANCE DATA / COURBES / KENNLINIEN

AXIAN PIROS / AXITUB PIROS / PIROS BOX 900 RPM Ø 800

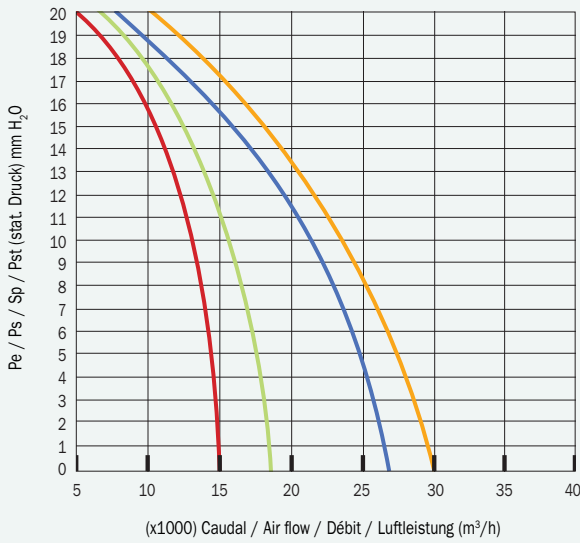


- 6-800 24-6 (0,55 kW)
- 6-800 30-6 (0,75 kW)
- 6-800 34-6 (1,10 kW)
- 6-800 45-6 (1,50 kW)

AXIAN SOLID / AXI BOX SOLID / AXITUB SOLID / AXIAN PIROS / PIROS BOX 900 RPM Ø 800

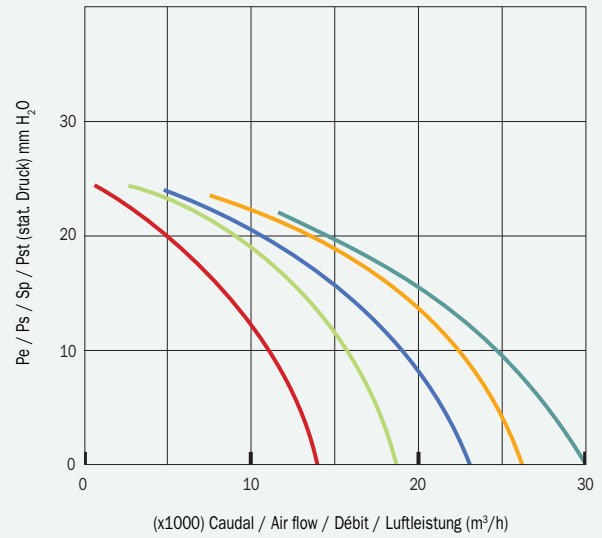


- 6-800 24-9 (0,75 kW)
- 6-800 30-9 (1,10 kW)
- 6-800 34-9 (1,50 kW)
- 6-800 40-9 (2,20 kW)
- 6-800 45-9 (3,00 kW)

AXIAL SOLID / AXIAN SOLID / AXI BOX SOLID / AXITUB SOLID / AXIAN PIROS / PIROS BOX 900 RPM Ø 800

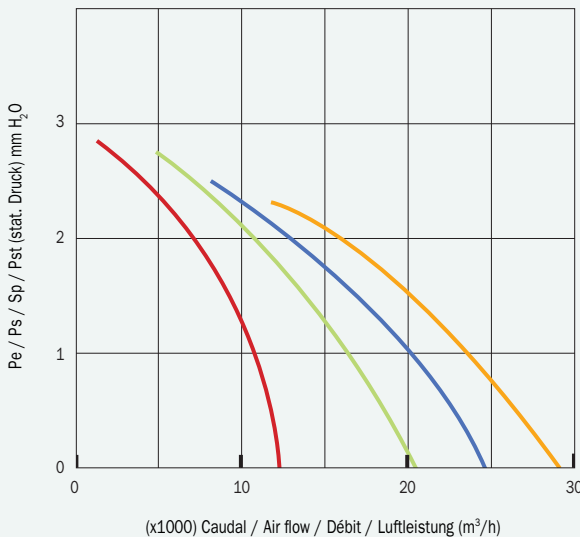

- 6-800 24-12 (1,10 kW)
- 6-800 34-12 (1,50 kW)
- 6-800 40-12 (2,20 kW)
- 6-800 45-12 (3,00 kW)


AXIAN SOLID / AXI BOX SOLID / AXITUB SOLID / AXIAN PIROS / AXITUB PIROS / PIROS BOX 900 RPM Ø 900

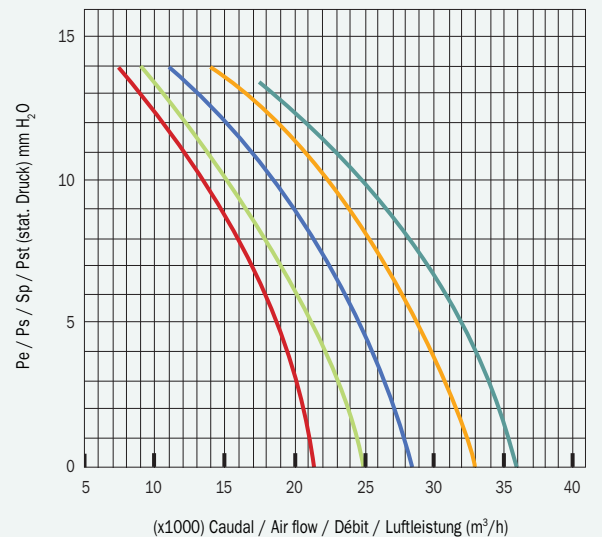

- 6-900 24-3 (0,55 kW)
- 6-900 30-3 (0,75 kW)
- 6-900 34-3 (1,10 kW)
- 6-900 40-3 (1,50 kW)
- 6-900 45-3 (2,20 kW)


CURVAS CARACTERÍSTICAS / PERFORMANCE DATA / COURBES / KENNLINIEN

AXIAN SOLID / AXI BOX SOLID / AXITUB SOLID / AXIAN PIROS / AXITUB PIROS / PIROS BOX 900 RPM Ø 900

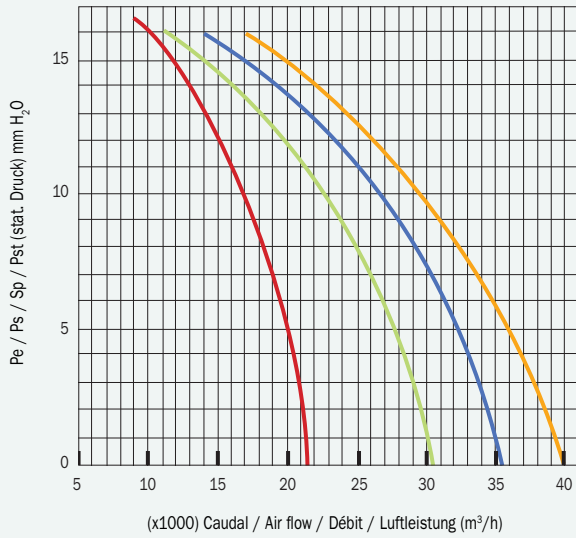


- 6-900 24-4 (0,55 kW)
- 6-900 30-4 (1,10 kW)
- 6-900 40-4 (1,50 kW)
- 6-900 45-4 (2,20 kW)

AXIAL SOLID / AXIAN SOLID / AXI BOX SOLID / AXITUB SOLID / AXIAN PIROS / AXITUB PIROS / PIROS BOX 900 RPM Ø 900

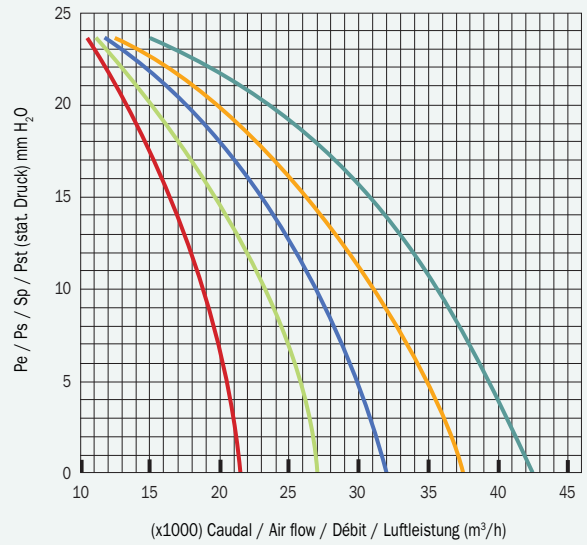


- 6-900 24-6 (0,75 kW)
- 6-900 30-6 (1,10 kW)
- 6-900 34-6 (1,50 kW)
- 6-900 40-6 (2,20 kW)
- 6-900 45-6 (3,00 kW)

AXIAN SOLID / AXI BOX SOLID / AXITUB SOLID / AXIAN PIROS / PIROS BOX 900 RPM Ø 900

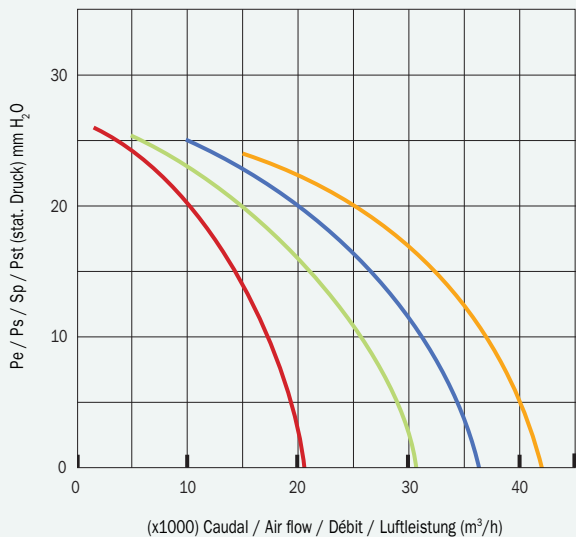

- 6-900 24-9 (1,50 kW)
- 6-900 34-9 (2,20 kW)
- 6-900 40-9 (4,00 kW)
- 6-900 45-9 (5,50 kW)


AXIAL SOLID / AXIAN SOLID / AXI BOX SOLID / AXITUB SOLID / AXIAN PIROS / PIROS BOX 900 RPM Ø 900

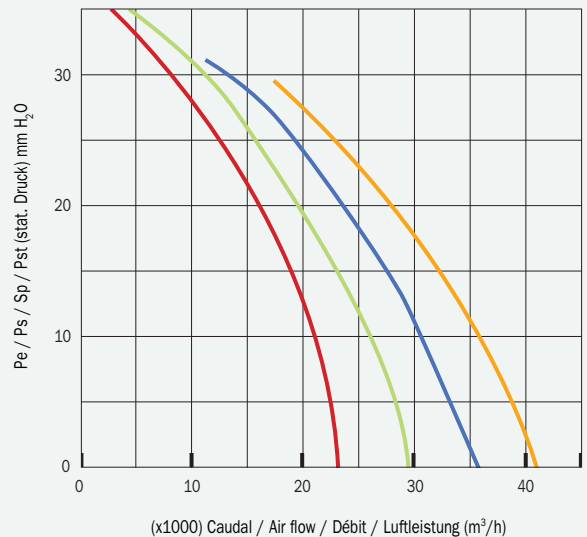

- 6-900 30-12 (2,20 kW)
- 6-900 34-12 (3,00 kW)
- 6-900 40-12 (4,00 kW)
- 6-900 45-12 (5,50 kW)


CURVAS CARACTERÍSTICAS / PERFORMANCE DATA / COURBES / KENNLINIEN

AXIAN SOLID / AXI BOX SOLID / AXITUB SOLID / AXIAN PIROS / AXITUB PIROS / PIROS BOX 900 RPM Ø 1000

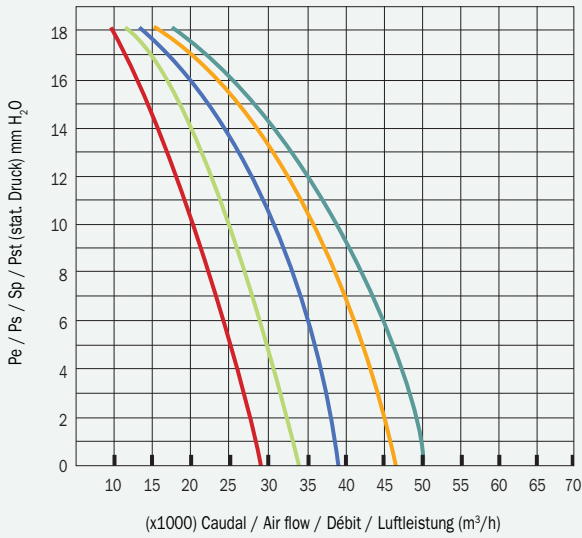


- 6-1000 24-3 (0,75 kW)
- 6-1000 30-3 (1,10 kW)
- 6-1000 34-3 (1,50 kW)
- 6-1000 40-3 (2,20 kW)
- 6-1000 45-3 (3,00 kW)

AXIAN SOLID / AXI BOX SOLID / AXITUB SOLID / AXIAN PIROS / AXITUB PIROS / PIROS BOX 900 RPM Ø 1000

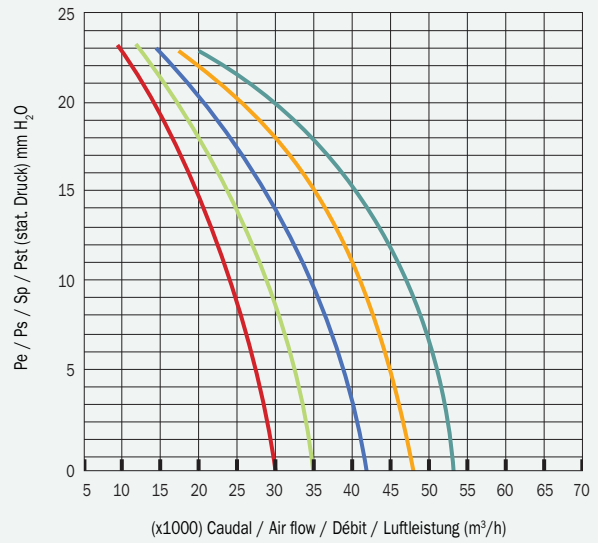


- 6-1000 24-4 (1,10 kW)
- 6-1000 30-4 (1,50 kW)
- 6-1000 34-4 (2,20 kW)
- 6-1000 40-4 (3,00 kW)
- 6-1000 45-4 (4,00 kW)

AXIAL SOLID / AXIAN SOLID / AXI BOX SOLID / AXITUB SOLID / AXIAN PIROS / AXITUB PIROS / PIROS BOX 900 RPM Ø 1000

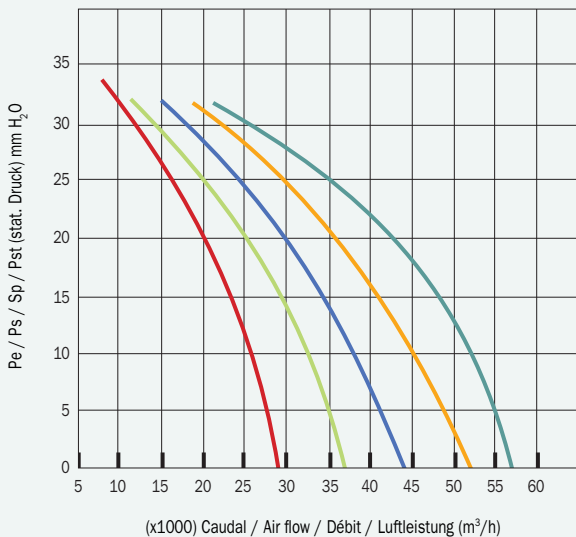

- 6-1000 24-6 (1,10 kW)
- 6-1000 30-6 (2,20 kW)
- 6-1000 34-6 (3,00 kW)
- 6-1000 40-6 (4,00 kW)
- 6-1000 45-6 (5,50 kW)


AXIAN SOLID / AXI BOX SOLID / AXITUB SOLID / AXIAN PIROS / PIROS BOX 900 RPM Ø 1000

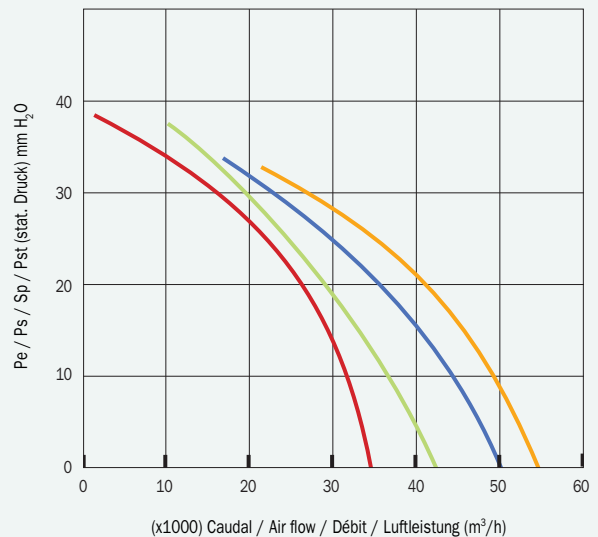

- 6-1000 30-9 (3,00 kW)
- 6-1000 34-9 (4,00 kW)
- 6-1000 40-9 (5,50 kW)
- 6-1000 45-9 (7,50 kW)


CURVAS CARACTERÍSTICAS / PERFORMANCE DATA / COURBES / KENNLINIEN

AXIAL SOLID / AXIAN SOLID / AXI BOX SOLID / AXIAN PIROS / AXITUB SOLID / PIROS BOX 900 RPM Ø 1000

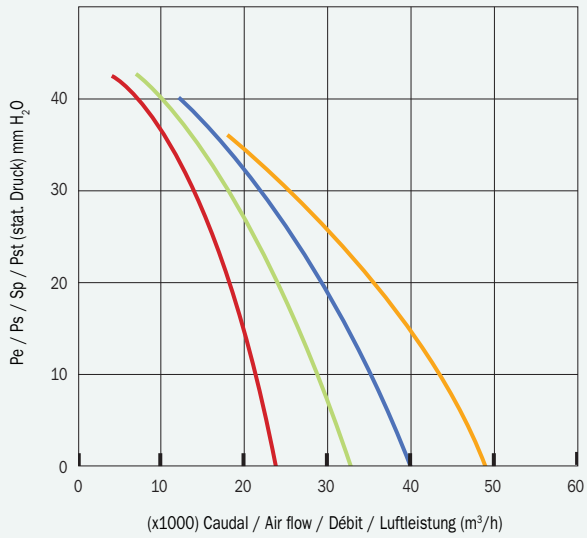


- 6-1000 24-12 (3,00 kW)
- 6-1000 30-12 (4,00 kW)
- 6-1000 34-12 (5,50 kW)
- 6-1000 40-12 (7,50 kW)

AXIAL SOLID / AXIAN SOLID / AXI BOX SOLID / AXIAN PIROS / AXITUB SOLID / PIROS BOX 900 RPM Ø 1000

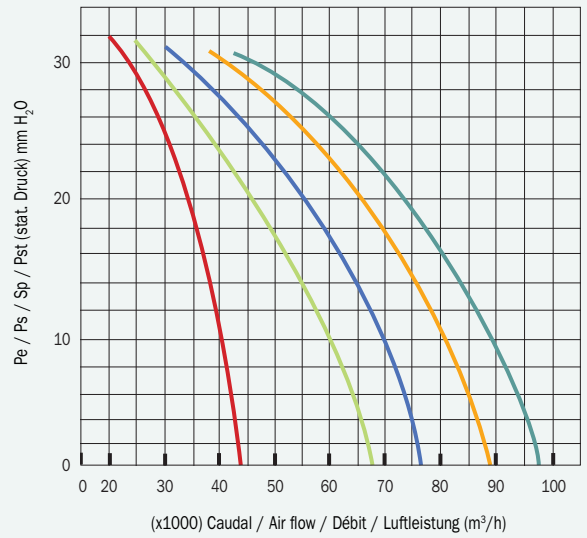


- 6-1250 24-3 (2,20 kW)
- 6-1250 30-3 (3,00 kW)
- 6-1250 34-3 (5,50 kW)
- 6-1250 40-3 (7,50 kW)
- 6-1250 45-3 (11,00 kW)

AXIAN SOLID / AXI BOX SOLID / AXITUB SOLID / AXIAN PIROS / AXITUB PIROS / PIROS BOX 900 RPM Ø 1250

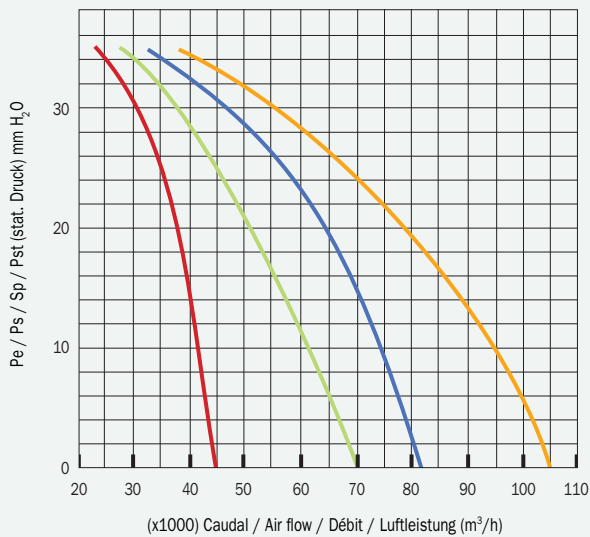

- 6-1250 24-4 (3,00 kW)
- 6-1250 30-4 (4,00 kW)
- 6-1250 34-4 (5,50 kW)
- 6-1250 45-4 (11,00 kW)


AXIAN SOLID / AXI BOX SOLID / AXITUB SOLID / AXIAN PIROS / AXITUB PIROS / PIROS BOX 900 RPM Ø 1250

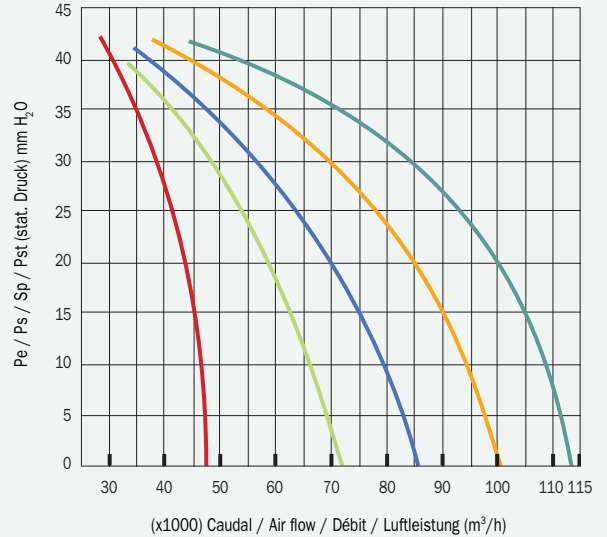

- 6-1250 24-6 (3,00 kW)
- 6-1250 30-6 (5,50 kW)
- 6-1250 34-6 (7,50 kW)
- 6-1250 40-6 (11,00 kW)
- 6-1250 45-6 (15,00 kW)


CURVAS CARACTERÍSTICAS / PERFORMANCE DATA / COURBES / KENNLINIEN

AXIAN SOLID / AXI BOX SOLID / AXITUB SOLID / AXIAN PIROS / PIROS BOX 900 RPM Ø 1250

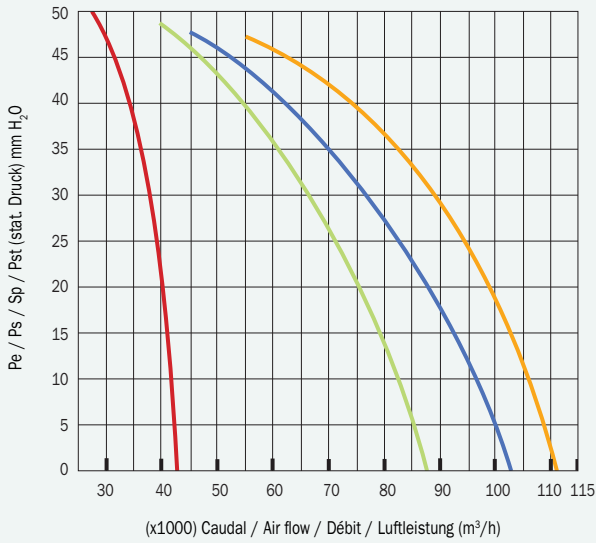


- 6-1250 24-9 (7,50 kW)
- 6-1250 34-9 (11,00 kW)
- 6-1250 40-9 (18,50 kW)
- 6-1250 45-9 (22,00 kW)

AXIAN SOLID / AXI BOX SOLID / AXITUB SOLID / AXIAN PIROS / PIROS BOX 900 RPM Ø 1250

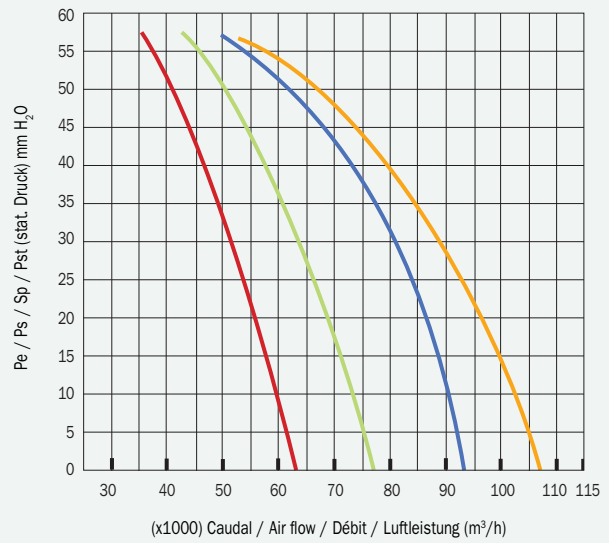


- 6-1250 24-12 (11,00 kW)
- 6-1250 34-12 (15,00 kW)
- 6-1250 40-12 (18,50 kW)
- 6-1250 45-12 (30,00 kW)

AXIAN SOLID / AXI BOX SOLID / AXITUB SOLID / AXIAN PIROS / AXITUB PIROS / PIROS BOX 700 RPM Ø 710

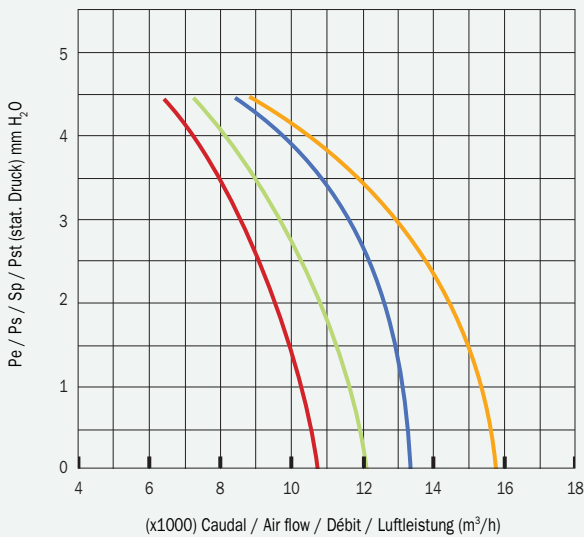

- 8-710 24-3 (0,18 kW)
- 8-710 30-3 (0,18 kW)
- 8-710 34-3 (0,25 kW)
- 8-710 45-3 (0,37 kW)


AXIAN SOLID / AXI BOX SOLID / AXITUB SOLID / AXIAN PIROS / AXITUB PIROS / PIROS BOX 700 RPM Ø 710

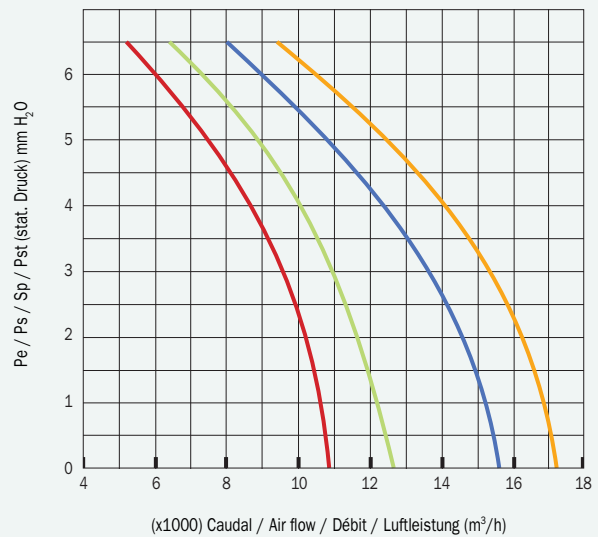

- 8-710 24-4 (0,18 kW)
- 8-710 30-4 (0,25 kW)
- 8-710 40-4 (0,37 kW)
- 8-710 45-4 (0,55 kW)


CURVAS CARACTERÍSTICAS / PERFORMANCE DATA / COURBES / KENNLINIEN

AXIAL SOLID / AXIAN SOLID / AXI BOX SOLID / AXITUB SOLID / AXIAN PIROS / AXITUB PIROS / PIROS BOX 700 RPM Ø 710

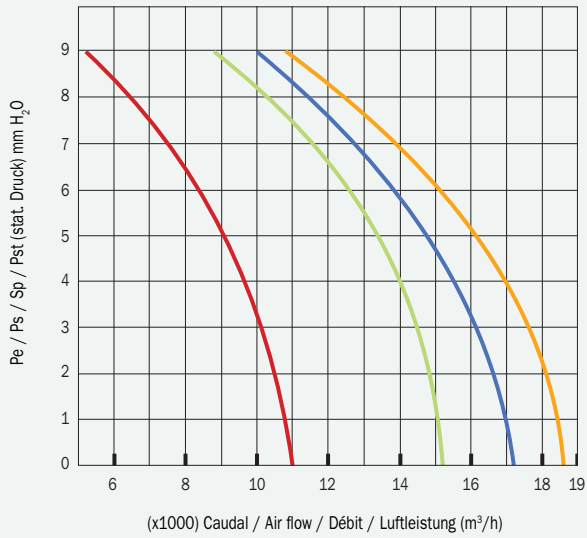


- 8-710 24-6 (0,25 kW)
- 8-710 30-6 (0,37 kW)
- 8-710 40-6 (0,55 kW)
- 8-710 45-6 (0,75 kW)

AXIAN SOLID / AXI BOX SOLID / AXITUB SOLID / AXIAN PIROS / AXITUB PIROS / PIROS BOX 700 RPM Ø 800

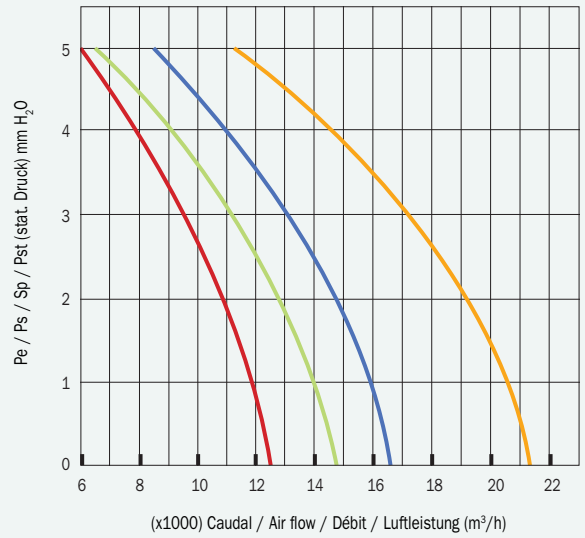


- 8-800 24-3 (0,18 kW)
- 8-800 30-3 (0,25 kW)
- 8-800 34-3 (0,37 kW)
- 8-800 45-3 (0,55 kW)

AXIAL SOLID / AXI BOX SOLID / AXITUB SOLID / AXIAN PIROS / AXITUB PIROS / PIROS BOX 700 RPM Ø 800

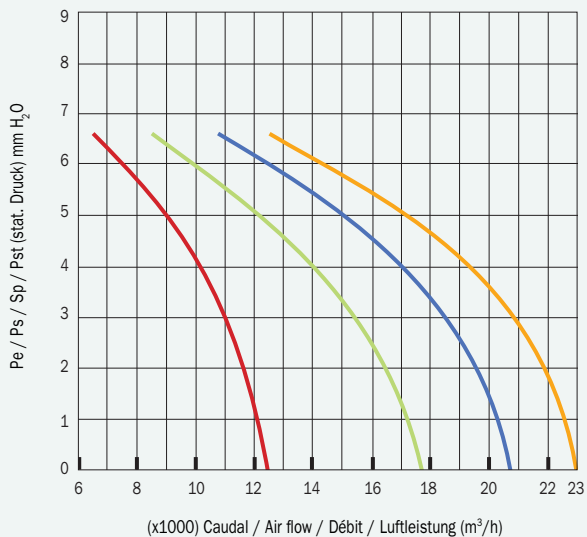

- 8-800 24-4 (0,18 kW)
- 8-800 30-4 (0,37 kW)
- 8-800 40-4 (0,55 kW)
- 8-800 45-4 (0,75 kW)


AXIAL SOLID / AXIAN SOLID / AXI BOX SOLID / AXITUB SOLID / AXIAN PIROS / AXITUB PIROS / PIROS BOX 700 RPM Ø 800

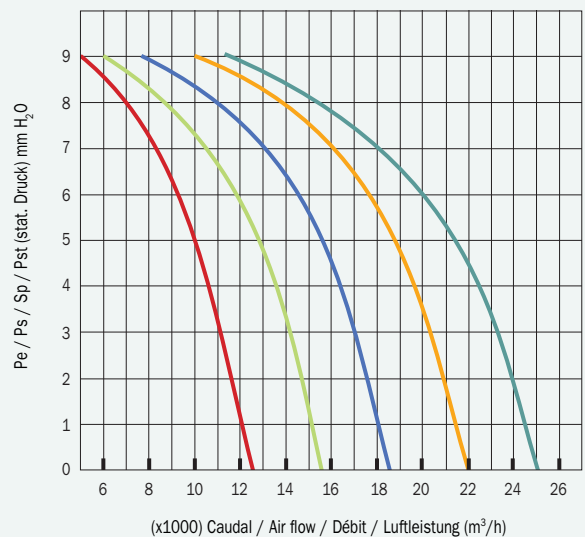

- 8-800 24-6 (0,25 kW)
- 8-800 30-6 (0,37 kW)
- 8-800 34-6 (0,55 kW)
- 8-800 40-6 (0,75 kW)
- 8-800 45-6 (1,10 kW)


CURVAS CARACTERÍSTICAS / PERFORMANCE DATA / COURBES / KENNLINIEN

AXIAL SOLID / AXI BOX SOLID / AXITUB SOLID / AXIAN PIROS / AXITUB PIROS / PIROS BOX 700 RPM Ø 800

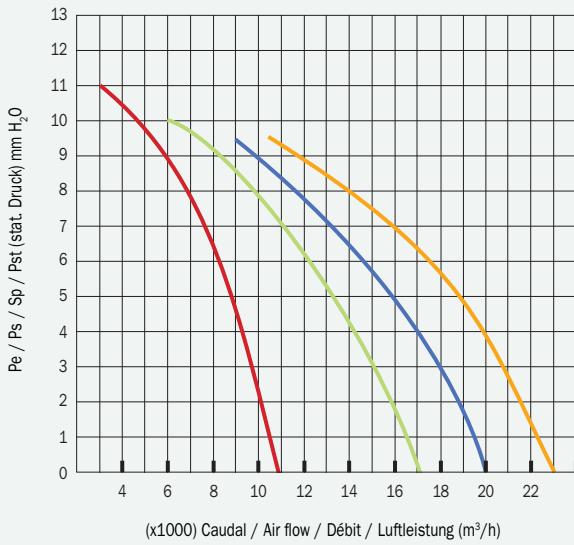


- 8-800 24-9 (0,37 kW)
- 8-800 34-9 (0,55 kW)
- 8-800 40-9 (0,75 kW)
- 8-800 45-9 (1,10 kW)

AXIAL SOLID / AXIAN SOLID / AXI BOX SOLID / AXIAN PIROS / AXITUB PIROS / PIROS BOX 700 RPM Ø 800

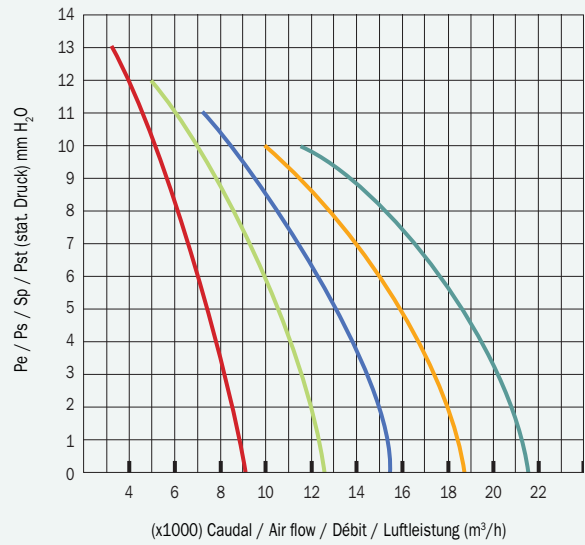


- 8-800 24-12 (0,37 kW)
- 8-800 30-12 (0,55 kW)
- 8-800 34-12 (0,75 kW)
- 8-800 40-12 (1,10 kW)
- 8-800 45-12 (1,50 kW)

AXIAL SOLID / AXI BOX SOLID / AXITUB SOLID / AXIAN PIROS / AXITUB PIROS / PIROS BOX 700 RPM Ø 900

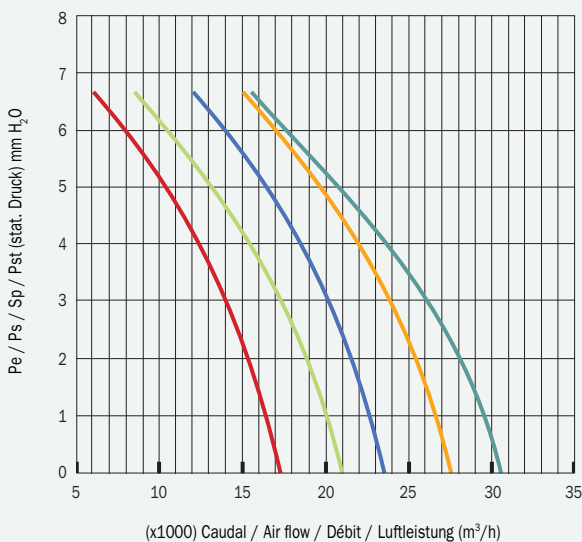

- 8-900 24-3 (0,25 kW)
- 8-900 30-3 (0,37 kW)
- 8-900 34-3 (0,55 kW)
- 8-900 40-3 (0,75 kW)
- 8-900 45-3 (1,10 kW)


AXIAL SOLID / AXI BOX SOLID / AXITUB SOLID / AXIAN PIROS / AXITUB PIROS / PIROS BOX 700 RPM Ø 900

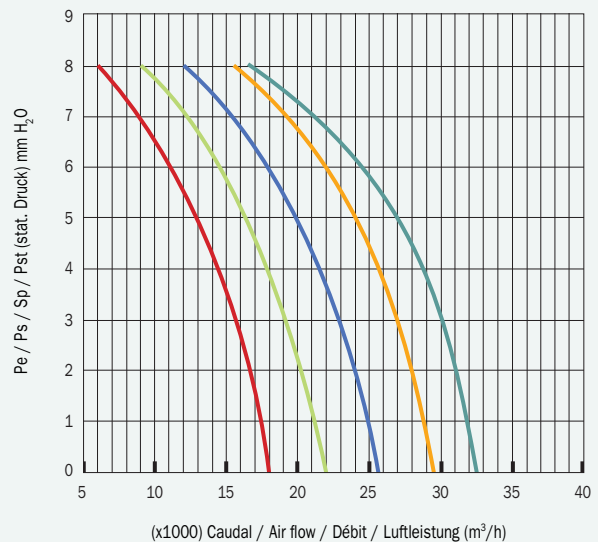

- 8-900 24-4 (0,37 kW)
- 8-900 30-4 (0,55 kW)
- 8-900 34-4 (0,75 kW)
- 8-900 40-4 (1,10 kW)
- 8-900 45-4 (1,50 kW)


CURVAS CARACTERÍSTICAS / PERFORMANCE DATA / COURBES / KENNLINIEN

AXIAL SOLID / AXIAN SOLID / AXI BOX SOLID / AXITUB SOLID / AXIAN PIROS / AXITUB PIROS / PIROS BOX 700 RPM Ø 900

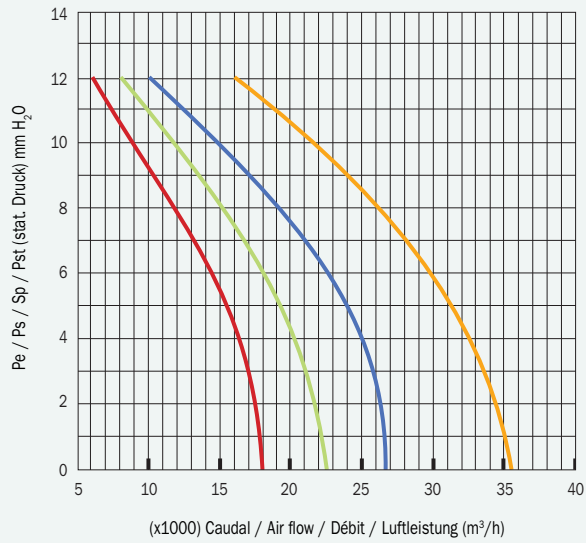


- 8-900 24-6 (0,37 kW)
- 8-900 30-6 (0,75 kW)
- 8-900 34-6 (1,10 kW)
- 8-900 45-6 (1,50 kW)

AXIAL SOLID / AXIAN SOLID / AXI BOX SOLID / AXITUB SOLID / PIROS BOX 700 RPM Ø 900

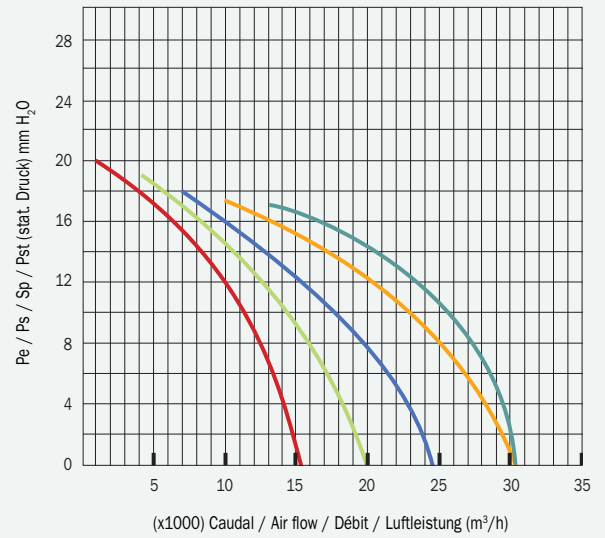


- 8-900 24-9 (0,55 kW)
- 8-900 30-9 (0,75 kW)
- 8-900 34-9 (1,10 kW)
- 8-900 40-9 (1,50 kW)
- 8-900 45-9 (2,20 kW)

AXIAL SOLID / AXIAN SOLID / AXI BOX SOLID / AXITUB SOLID / AXIAN PIROS / PIROS BOX 700 RPM Ø 900

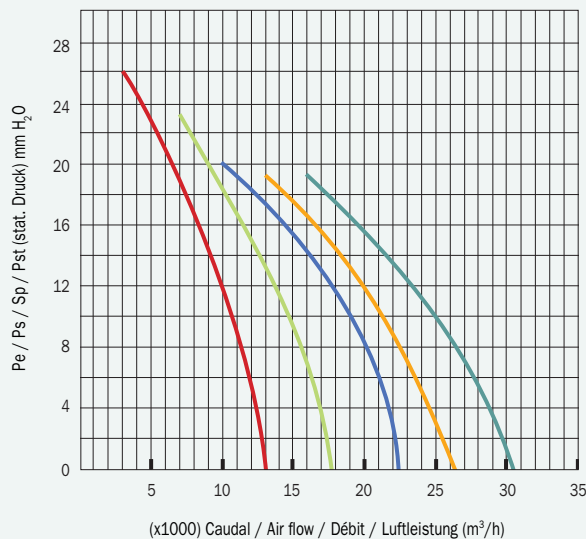

- 8-900 24-12 (0,75 kW)
- 8-900 30-12 (1,10 kW)
- 8-900 34-12 (1,50 kW)
- 8-900 40-12 (2,20 kW)
- 8-900 45-12 (3,00 kW)


AXIAL SOLID / AXI BOX SOLID / AXITUB SOLID / AXIAN PIROS / AXITUB PIROS / PIROS BOX 700 RPM Ø 1000

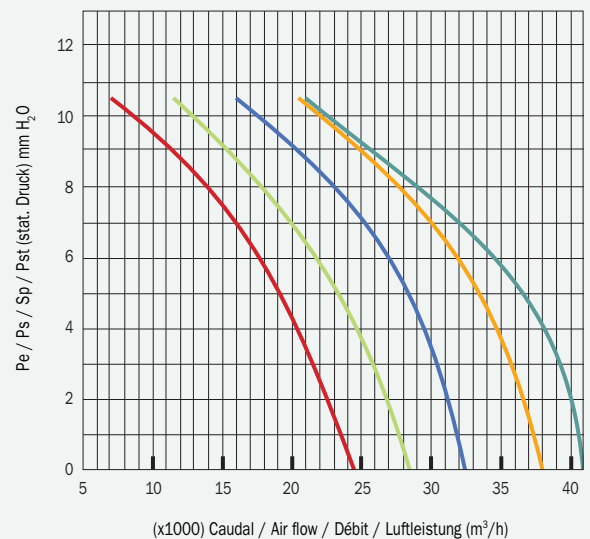

- 8-1000 24-3 (0,55 kW)
- 8-1000 30-3 (0,75 kW)
- 8-1000 34-3 (1,10 kW)
- 8-1000 40-3 (1,50 kW)
- 8-1000 45-3 (2,20 kW)


CURVAS CARACTERÍSTICAS / PERFORMANCE DATA / COURBES / KENNLINIEN

AXIAN SOLID / AXI BOX SOLID / AXITUB SOLID / AXIAN PIROS / AXITUB PIROS / PIROS BOX 700 RPM Ø 1000

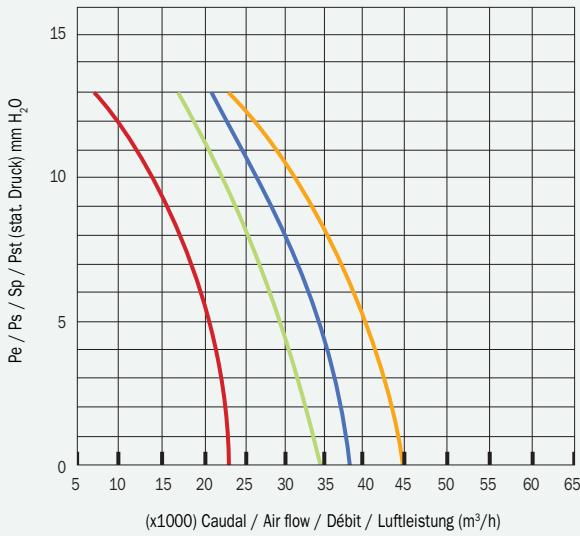


- 8-1000 24-4 (0,55 kW)
- 8-1000 30-4 (1,10 kW)
- 8-1000 40-4 (1,50 kW)
- 8-1000 45-4 (2,20 kW)

AXIAL SOLID / AXIAN SOLID / AXI BOX SOLID / AXITUB SOLID / AXIAN PIROS / AXITUB PIROS / PIROS BOX 700 RPM Ø 1000

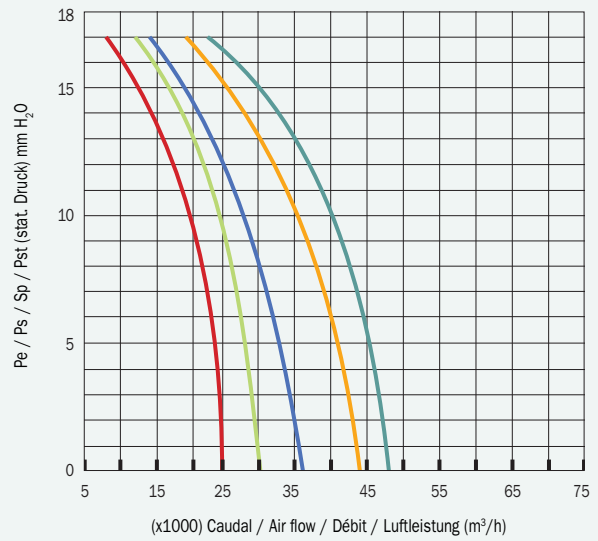


- 8-1000 24-6 (0,75 kW)
- 8-1000 30-6 (1,10 kW)
- 8-1000 34-6 (1,50 kW)
- 8-1000 40-6 (2,20 kW)
- 8-1000 45-6 (3,00 kW)

AXIAN SOLID / AXI BOX SOLID / AXITUB SOLID / AXIAN PIROS / PIROS BOX 700 RPM Ø 1000

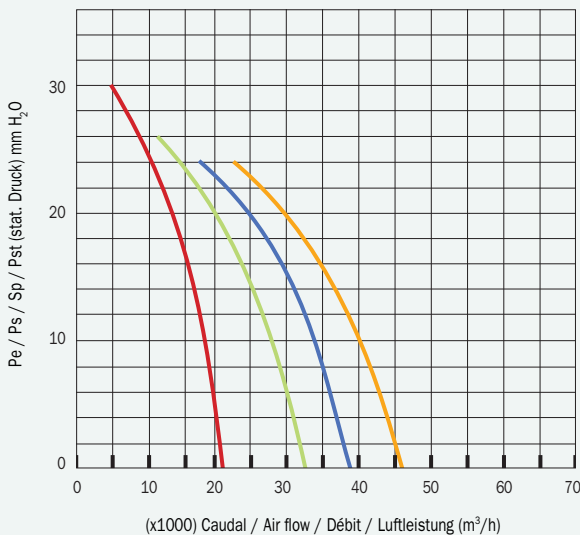

- 8-1000 24-9 (1,10 kW)
- 8-1000 34-9 (1,50 kW)
- 8-1000 40-9 (2,20 kW)
- 8-1000 45-9 (3,00 kW)


AXIAL SOLID / AXIAN SOLID / AXI BOX SOLID / AXITUB SOLID / AXIAN PIROS / PIROS BOX 700 RPM Ø 1000

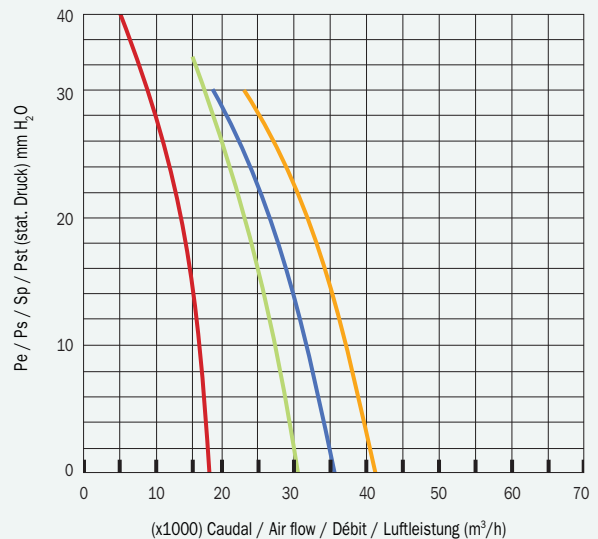

- 8-1000 24-12 (1,5 kW)
- 8-1000 34-12 (2,2 kW)
- 8-1000 40-12 (3,00 kW)
- 8-1000 45-12 (4,00 kW)


CURVAS CARACTERÍSTICAS / PERFORMANCE DATA / COURBES / KENNLINIEN

AXIAN SOLID / AXI BOX SOLID / AXITUB SOLID / AXIAN PIROS / AXITUB PIROS / PIROS BOX 700 RPM Ø 1250

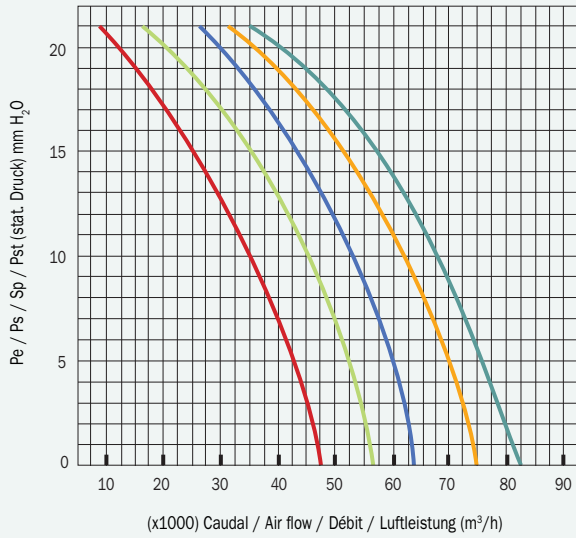


- 8-1250 24-3 (1,50 kW)
- 8-1250 30-3 (2,20 kW)
- 8-1250 34-3 (3,00 kW)
- 8-1250 40-3 (4,00 kW)
- 8-1250 45-3 (5,50 kW)

AXIAN SOLID / AXI BOX SOLID / AXITUB SOLID / AXIAN PIROS / AXITUB PIROS / PIROS BOX 700 RPM Ø 1250

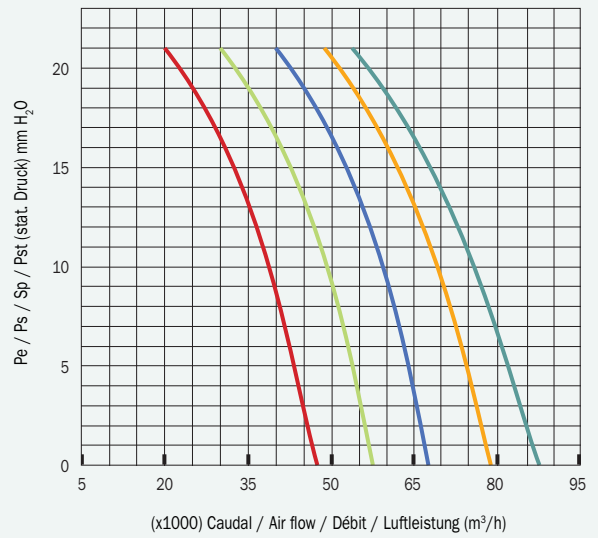


- 8-1250 24-4 (1,50 kW)
- 8-1250 30-4 (3,00 kW)
- 8-1250 34-4 (4,00 kW)
- 8-1250 40-4 (5,50 kW)
- 8-1250 45-4 (7,50 kW)

AXIAN SOLID / AXI BOX SOLID / AXITUB SOLID / AXIAN PIROS / AXITUB PIROS / PIROS BOX 700 RPM Ø 1250

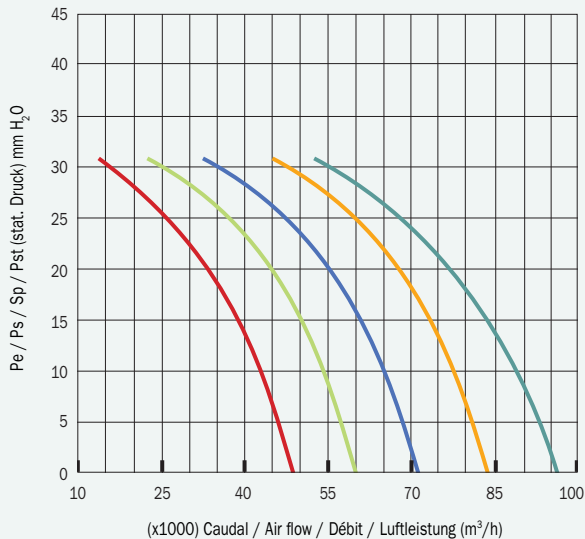

- 8-1250 24-6 (2,20 kW)
- 8-1250 30-6 (4,00 kW)
- 8-1250 34-6 (5,50 kW)
- 8-1250 40-6 (7,50 kW)
- 8-1250 45-6 (11,00 kW)


AXIAN SOLID / AXI BOX SOLID / AXITUB SOLID / AXIAN PIROS / AXITUB PIROS / PIROS BOX 700 RPM Ø 1250

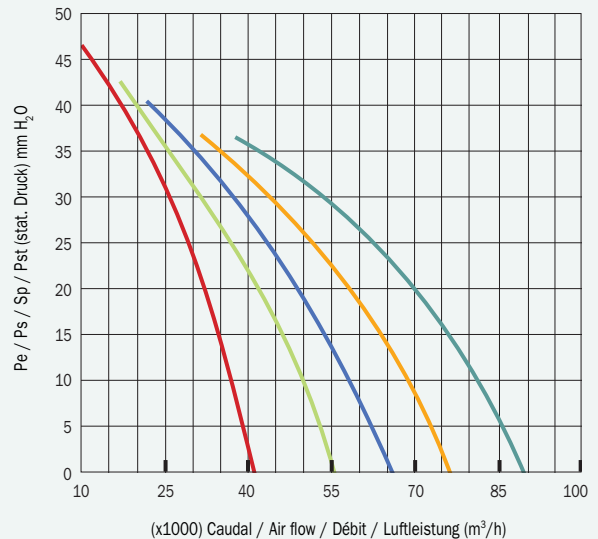

- 8-1250 24-9 (3,00 kW)
- 8-1250 30-9 (4,00 kW)
- 8-1250 34-9 (5,50 kW)
- 8-1250 40-9 (7,50 kW)
- 8-1250 45-9 (11,00 kW)

CURVAS CARACTERÍSTICAS / PERFORMANCE DATA / COURBES / KENNLINIEN

AXIAN SOLID / AXI BOX SOLID / AXITUB SOLID / AXIAN PIROS / PIROS BOX 700 RPM Ø 1250

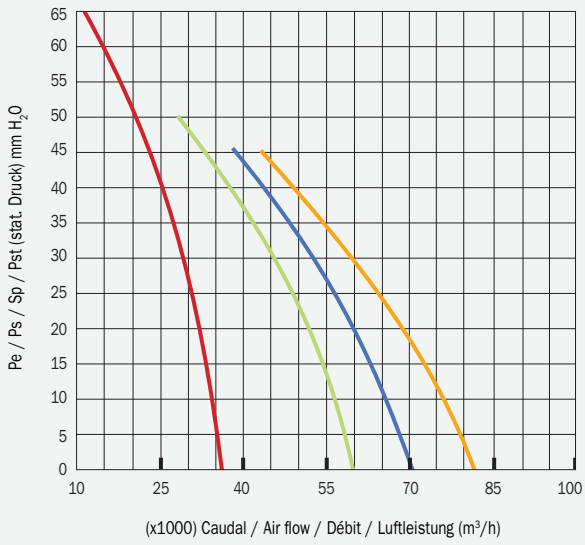

- 8-1250 24-12 (4,00 kW)
- 8-1250 34-12 (5,50 kW)
- 8-1250 40-12 (7,50 kW)
- 8-1250 45-12 (11,00 kW)